

PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁵ : A43D 1/02, A61B 5/107 G01B 11/24		A1	(11) International Publication Number: WO 91/17676 (43) International Publication Date: 28 November 1991 (28.11.91)
(21) International Application Number: PCT/US90/02868 (22) International Filing Date: 14 May 1990 (14.05.90) (30) Priority data: 520,591 11 May 1990 (11.05.90) US 520,572 11 May 1990 (11.05.90) US (71) Applicant: FOOT IMAGE TECHNOLOGY, INC. [US/ US]; 1620 Southwest Overturf, Bend, OR 97702 (US). (72) Inventors: WHITE, Jay, P. ; 1620 Southwest Overturf, Bend, OR 97702 (US). THIES, Wesley, A. ; 454 West 7th Street, Red Wing, MN 55066 (US). SWEASY, William, J., Jr. ; 721 East Avenue, Red Wing, MN 55066 (US).		(74) Agent: HAMRE, Curtis, B.; Merchant, Gould, Smith, Edell, Welter & Schmidt, 3100 Norwest Center, 90 South Seventh Street, Minneapolis, MN 55402 (US). (81) Designated States: AT (European patent), AU, BE (Euro- pean patent), BR, CA, CH (European patent), DE (Eu- ropean patent)*, DK (European patent), ES (European patent), FR (European patent), GB (European patent), HU, IT (European patent), JP, KR, LU (European pa- tent), NL (European patent), NO, SE (European patent), SU. Published With international search report.	

(54) Title: SYSTEM OF IMAGING, CATALOGING, AND OVERLAYING FEET AND FOOTWEAR

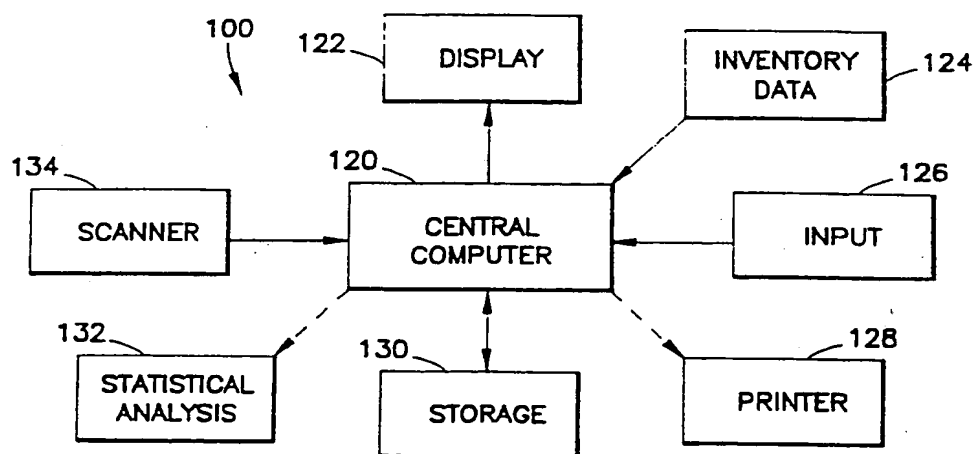

(57) Abstract

A system is provided for visually displaying foot images and overlaying of an image of selected footwear which includes a visual display (122) for displaying a measured foot image and an image of a selected footwear as well as an input device (126) for causing relative movement between the image of the selected footwear and the measured foot image to electronically determine the fit of the selected footwear with the measured foot. The system may include a foot measuring device (134) for measuring the foot and producing an image of the foot on the visual display (122) and a footwear database for providing selected footwear data to the visual display (122). In addition, an integrated system is provided for footwear visual image cataloging and selection which includes a foot measuring device (134) for electronically measuring a customer's foot, a data processing device (120) for receiving foot measurement data, customer identification data and customer preference data, a storage device (170) for storing a footwear catalog comprising footwear images and footwear related data, and a visual display (122) for displaying images and data related to the measured foot, suggested footwear images and suggested footwear related data stored in the footwear catalog wherein the suggested footwear images and footwear related data are automatically selected by matching the customer preference data and foot measurement data to footwear related data in the footwear catalog.

DESIGNATIONS OF "DE"

Until further notice, any designation of "DE" in any international application whose international filing date is prior to October 3, 1990, shall have effect in the territory of the Federal Republic of Germany with the exception of the territory of the former German Democratic Republic.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FK	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

SYSTEM OF IMAGING, CATALOGING, AND OVERLAYING FEET AND FOOTWEAR

Field of the Invention

5 This invention relates in general to the footwear manufacturing process including sales from a retail store, footwear design, last production, and finally the manufacturing of footwear. More particularly, it relates to an integrated computerized
10 system for measuring and sizing feet and providing custom fit footwear for customers while maintaining optimized inventory of footwear for retail stores and manufacture of footwear. In addition, through statistical analysis of customer orders, it can be
15 determined which footwear lasts are most likely to be required for producing footwear to fit a particular portion of the general population. This system thereby enables more accurate and efficient production of footwear and lasts for the general public consumption.
20 Further, the present invention utilizes the foot sizing method and last production method disclosed in a co-pending U.S. Patent Application Serial No. 416,624, filed October 3, 1989, hereinafter referred to as the TWAC™ measurement system.

25

Background of the Invention

Throughout modern history, the footwear industry has been a highly specialized and competitive environment. Most footwear manufacturers have felt a
30 need to be as efficient as possible while providing high quality footwear for the majority of consumers. In recent years, this desire for efficiency has been increased due to the rise in international trade and competition as well as increased consumer demand.
35 Therefore, footwear manufacturers have found it necessary to adapt to the market conditions by providing as many styles and sizes of shoes as possible to the public to better serve the needs of the consumers. Until recently, computerized automation of the footwear

industry has been relatively limited; however, with the advent of more sophisticated computing machines and software to drive the computing machines, it has become possible to integrate the entire process of manufacturing footwear. The present invention provides a solution to this need for improved productivity and efficiency by integrating the entire process of selling retail footwear. As will be discussed below, the present invention seeks to integrate the entire footwear sales process including, at least, improved measurement capabilities, matching the foot to particular footwear, and the footwear design process, the footwear manufacturing process.

15 Summary of the Invention

A system is provided for visually displaying foot images and overlaying an image of selected footwear which includes a visual display for displaying a measured foot image and an image of a selected footwear as well as an input device for causing relative movement between the image of the selected footwear and the measured foot image to electronically determine the fit of the selected footwear with the measured foot. The system may include a foot measuring device for measuring the foot and producing an image of the foot on the visual display and a footwear database for providing selected footwear data to the visual display. A method is provided for foot shape imaging and overlay comprising the steps of electronically measuring the foot and producing an image of the foot on a visual display, selecting footwear from an electronic footwear selection database and displaying an inner shape image of the selected footwear on the visual display in overlaying relation to the foot image to determine whether the selected footwear will fit on the measured foot. The method of foot shape imaging and overlay may further include the step of displaying a footwear liner

region image defined by a footwear inner perimeter image and a footwear liner image on the visual display in overlaying relation to the foot image to determine whether the selected footwear will fit on the measured
5 foot. In addition, the method may include the step of assigning a color hue to a portion of the foot image located within the liner region image such that the color of the foot image portion within the liner region image is different from the color of the foot image not
10 within the liner region image.

In addition, the system also provides for footwear visual image cataloging and selection which includes a foot measuring device for electronically measuring a customer's foot, a data processing device
15 for receiving foot measurement data, customer identification data and customer preference data, a storage device for storing a footwear catalog comprising footwear images and footwear related data, and a visual display for displaying images and data related to the
20 measured foot, suggested footwear images and suggested footwear related data stored in the footwear catalog wherein the suggested footwear images and footwear related data are automatically selected by matching the customer preference data and foot measurement data to
25 footwear related data in the footwear catalog. An integrated method is provided for footwear visual image cataloging and selection comprising the steps of measuring a customer's foot, inputting customer information and preference data, storing a footwear
30 catalog comprised of images and data related to available footwear, automatically selecting suggested footwear for the customer and visually displaying images and data relating to the measured foot and suggested footwear.

35

Brief Description of the Drawings

Figure 1 is a block diagram showing a

generalized diagram of the present computerized system.

Figure 2 is a block diagram showing a preferred embodiment of the present electro-optical foot scanner system.

5 Figure 3 is a block diagram showing a detailed depiction of the elements of the preferred embodiment central computer.

10 Figure 3A is a block diagram showing a detailed depiction of the elements of the preferred embodiment electro-optical foot scanner.

 Figures 4A, 4B and 4C show a flowchart diagramming an example of operating a preferred embodiment electro-optical foot scanner unit from a user's point of view.

15 Figure 5 shows a flowchart diagramming an alternative example of operating a preferred embodiment electro-optical scanner unit from a user's point of view.

20 Figures 6 through 67 are representations of example menu/screen displays presented to a user during operation of the preferred embodiment electro-optical scanner unit in accordance with the flowchart diagrams, shown in Figures 4A, 4B, 4C and 5.

25 Detailed Description

 Detailed preferred embodiments of the present invention are disclosed. It is to be understood, however, that the disclosed embodiments are merely exemplary of the invention, which may be embodied in
30 various forms. Therefore, specific structural and functional details disclosed are not to be interpreted as limiting, but rather as a representative basis for teaching one skilled in the art to variously employ the present invention in virtually any appropriately
35 detailed system or structure.

 Referring now more particularly to Figure 1, which is a block diagram showing a generalized diagram

of the present computerized system. The present computerized system encompasses a preferred footwear manufacturing environment from the retail store outlet through the manufacturing process and back to the retail footwear store. In particular, within the preferred retail footwear store 102, an electro-optical foot scanner unit 100 would preferably be placed to determine customer footwear size needs. Foot scanner unit 100 would derive a three-dimensional topographical image of a particular customer's feet. From the electronically derived topographical image of the feet, a foot size is electronically computed. The foot size could be assigned according to any foot sizing method including, for example, the Brannock measuring system, the TWAC™ measurement system and others. Foot measurement information for the particular customer would be stored in a database for a later transference to a centralized database. After determining the particular size of footwear required for the customer, a substantially instantaneous electronic query can be made by way of a computing device into electronically stored inventory data to determine if such a size is available of the desired footwear to provide to the particular customer.

By way of example, the following will describe the procedures for transferring the foot sizing information of a particular customer to the manufacturing facilities so that custom fit footwear can be made and subsequent transference of that finished product back to the retail footwear store is accomplished. After electro-optical scanning of the particular customer's feet with foot scanner 100, information is transferred to a central storage facility for a particular retail footwear store 102. Subsequently, such information is electronically transferred to a centralized database 104 by way of one of several communication methods including a computerized network transfer, serial data

communication, parallel data communication, and modem communication or by transferring a storage medium such as a floppy disk, magnetic tape, optical disk, punch tape, punch card, or other storage medium readable by an electronic computing means. Once the customer foot size information is in the centralized database 104, a query into an existing footwear last database 116 is checked electronically for a last which could be used to manufacture a custom fit piece of footwear for the particular customer. In the preferred embodiment, information would be stored on all lasts kept for use in manufacturing particular footwear according to size and style. In querying the existing last database 116 with sizing information for the particular customer, lasts preferably would be selected which closely match the particular customer's needs as well as lasts which exactly match the particular customer's needs. If it is determined that a last exists which would be useable for the particular custom footwear, information can be transferred to footwear production facilities 114 so that the chosen last can be used to manufacture custom fit footwear and other footwear products for the customer. Custom footwear products could include items such as custom fit insoles, heel cups, metatarsal support, volume adjustment shims, and the like. Custom footwear could include boots, shoes, and other various forms of footwear.

If a last which would produce footwear fitting the particular customer is not found in the existing last database 116, the foot measurement information for the customer can be transferred to a CAD/CAM machine 110 which electronically receives the scanned feet data and style preference information. From the received data the CAD/CAM machine 110 generates machine control code for producing a last. Once the machine control code is generated, the information may be transferred electronically or otherwise to a last production machine

112 which can produce a unique last for the customer. After producing the unique last for the customer, the last can be transferred to the footwear manufacturing facilities 114 so that custom footwear and footwear products can be manufactured for the customer. In the preferred embodiment, the manufactured footwear and footwear products can then be sent to the retail footwear store 102 for delivery to the customer. The unique last may also be transferred to the retail footwear store for storage at the retail footwear store or delivery to the customer so that the customer can save the last for subsequent manufacturing of custom footwear and footwear products.

Centralized footwear database 104 also has links to a mechanism which can perform statistical trend analysis 106 for determining such information as may be desired. Some of the statistical trend analysis may include particular styles or sizes of styles which are requested frequently by customers as well as which lasts are the best lasts to store for subsequent use in manufacturing products for other customers. Thus, by providing improved statistical analysis of actual feet, it is possible to more efficiently "nest" the last production itself. For example, such "nesting" may occur due to phenomenon such as gender, occupation, geography, ethnic background, or other diverse characteristics. In addition, the statistical analysis mechanism 106 can transfer the information to quality and inventory control mechanisms 108 so that improvements in the styles and sizes of existing lasts used in mass production of footwear can be made if desirable by modifying the information stored in the existing last database 116. Substantial last and footwear inventory reductions are possibly utilizing this improved method of last inventory management.

Referring now more particularly to Figure 2, a block diagram showing the preferred embodiment of the

present electro-optical foot scanner system 100 is shown. In the preferred embodiment, a central computing device 120 controls operations of several peripheral devices. Display 122 is coupled to central computer 120 so that information which is received by the central computer may be displayed for viewing by a user.

Display 122 in the preferred embodiment includes an electronic video display capable of reproducing images consisting of a plurality of hues and shades of color.

In addition, central computer 120 is coupled to inventory data 124 which can be stored in storage device 130 or in other storage devices proximate foot scanner unit 100. Inventory data 124 includes information concerning number of footwear available at retail footwear store 102 in particular styles and sizes. Further inventory data 124 may include information which indicates all footwear styles and sizes available from a footwear manufacturer 114 at a particular retail footwear store 102 on request, or other information.

Input device 126 provides means for obtaining information from a user and supplying such information to central computer 120. Input device 126 may include many types of electronic input devices including a keyboard, mouse, track ball, light pen, electronic tablet, and touch screen, voice recognition unit, or other devices. It will be appreciated by those skilled in the art that improved input devices may be substituted for use in the preferred embodiment as they are developed. In the preferred embodiment, foot scanner unit 100 is optimized for use with a combination of keyboard and touch screen input devices. These input devices are used to select menu choice options presented on display 122 as well as input and retrieve information used by central computer 120.

A storage device 130 is coupled to central computer 120 for local storage of information received by central computer 120. Storage device 130 may be

configured in several forms including combination of tape drives, hard disk drives, floppy disk drives, optical disk drives, static ram or other electronic storage devices. It will be appreciated by those skilled in the art that the particular storage device used will be highly dependent upon the performance characteristics desired for use in the particular environment in which the foot scanner unit is to be utilized. In the preferred embodiment, a hard disk drive is utilized for local storage of information.

A scanner unit 134 is coupled to central computer 120. The scanner unit 134, as will be further detailed in Figure 3A, provides a three-dimensional, topographical electronic image of a foot which has been scanned. In other words, the scanner unit 134 provides precision contour mapping of bottom surfaces and substantially bottom facing surfaces of a scanned foot. Particular topographical information concerning a particular foot may be derived by determining the intensity of lightness and darkness of portions of the scanned foot image with respect to other portions of the scanned foot image. In particular, image portions which are generally lighter in color or intensity are designated as being closer to the scanner unit than portions of the foot which are darker in color or intensity. Further, parts of the foot which actually touch the surface of the electro-optical scanner 134 are all the same distance from the surface of the scanner; however, the color of the scanned foot still varies. For example, the color of the surface of the foot pressed against the surface of the scanner 134 may vary according to the amount of pressure applied to the surface of the scanner unit in direct correlation to the amount of blood flowing through the foot surface at that particular point. In this case, foot surfaces under extreme pressure will be lighter in color hue than foot surfaces under less pressure which will be generally

pinkish or skin tone in color. By further defining the topographical image of the scanned foot which is in contact with the surface of the scanner 134 to include variations according to foot surface color, a more
5 accurate image of the scanned foot is formed.

In addition, the foot scanner 134 may be adjusted to accommodate a foot with light skin tone, dark skin tone, a white sock, or even a dark sock by varying the intensity of the light source used in the
10 electro-optical scanning process which is directed at the foot being scanned. It will be appreciated by those skilled in the art that improved scanner units may be substituted for use in the preferred embodiment foot sizing system without departing from the teachings of
15 the present invention. More particularly, alternative methods of obtaining topographical information on a foot may be utilized such as laser-optic scanners, CAT scanners, pressure plate scanners, resistive force plates, nuclear magnetic scanners, acoustic-based
20 scanners, variable height pin and electromechanical array based scanners, or other three-dimensional measurement devices in place of the preferred embodiment electro-optical scanner.

In an alternative embodiment, a printer 128 may
25 also be coupled to central computer 120 so that hard copy of information which has been displayed on display 122 may be provided to a user or customer. In addition, the information stored and manipulated by central computer 120 may also be provided to statistical
30 analysis tools 132 for use in computing optimum retail store inventory of footwear, ordering more inventory of footwear, determining the most popular styles of footwear, or other various statistical analysis which may utilize information already stored through central
35 computer 120.

Referring now more particularly to central computer 120, as detailed in Figure 3. Central computer

120 preferably includes several optimized elements for manipulating and interfacing with externally coupled devices. Central computer 120 is generally operated through a central processing unit (CPU) 142 which is
5 logically coupled to a central bus 140. Bus 140 passes data between all of the elements of central computer 120. By way of bus 140, CPU 142 communicates with a scanner basic input/output system (BIOS) 144 which is in turn coupled through bus 140 to a small computer system
10 interface (SCSI) 150 operatively interconnected to the scanner. BIOS 144 provides instructions to the scanner during the scanning process and helps control the flow of information to and from the scanner.

CPU 142 further communicates through bus 140 to
15 video controller 146 which is operatively interconnected to the display or monitor. Video controller 146 generates display screens compatible with the monitor from information provided by CPU 142. Such information may include an electronically enhanced scanned image of
20 a customer's foot, footwear catalog information, pricing, and retail footwear store inventory.

The electronically enhanced scanned image preferably is displayed in a plurality of colors or shades of a single color. Preferably, those portions of
25 the scanned foot image which have been determined to be closest to the scanner 134 surface by central computer 120 are assigned the colors of lightest hue or shades of a single color of highest intensity. In addition, the portions of the foot surface deemed to be furthest away
30 from the scanner 134 surface by central computer 120 are assigned colors of darker hues or shades of a single color which are darker in light intensity than those assigned to portions of the foot which were deemed closer to the scanner 134 surface by central computer
35 120. It will be appreciated by those skilled in the art that the shades of a color or a plurality of colors may be assigned in a variety of different manners while

precisely depicting the topographical contours of the foot. The present invention should not be limited to the particular colors or shades of color assignment schemes detailed hereinafter.

5 For example, in the preferred embodiment, a scanned foot image, such as the one shown in Figures 8 and 9, has a stereoscopic appearance due to the assignment of shades of gray which are lighter or darker based on distance of the foot from the scanner 134
10 surface. In particular, lighter shades of gray have been assigned to the bottoms of the toes and heel which are under higher pressure due to the weight of the owner of the foot than the surrounding areas which are also touching the scanner 134 surface. Similarly, the
15 portions of the scanned foot which are not touching the surface of the scanner are also assigned lighter shades of gray if those portions are nearer the scanner 134 surface than the surrounding areas which are not touching the scanner 134 surface. It will be
20 appreciated that a similar light to dark assignment of scheme can be applied if a color display were utilized such that colors which correspond to lighter or more bright hues could be assigned to the foot image portions which are to appear closer than foot image portions
25 which are to appear as if they are farther away. This assignment of shades of gray and colors is in accordance with the natural perceptive techniques that the human eye uses to assign depth to a two-dimensional image it is viewing. Further, it will be appreciated that
30 numerous modifications to the assignment of shades and color hues presented on the display 122 for a foot image can be made without departing from the scope of the present invention.

CPU 142 is further coupled through bus 140 to
35 serial input/output interface 148 which provides a communication port through which input devices, preferably including a keyboard and touch screen may

provide information to CPU 142. In addition, serial input/output (I/O) device 148 is operatively interconnected to remotely located inventory data 124 via a local area network, modem or other form of serial communication.

The remotely located inventory data 124 may be stored within centralized database 104. CPU 142 is operatively interconnected through bus 140 to specialized micro-chip controllers which improve the performance of central computer 120 by reducing the demands on CPU 142. These specialized chips include a math co-microprocessor 156 and direct memory access (DMA) controller 154. Math co-microprocessor 156 alleviates much of the computational demand placed on CPU 142 for the graphic intensive operations of central computer 120 thereby allowing CPU 142 to work on other tasks more efficiently. DMA controller 154 also alleviates part of the data manipulation load placed on CPU 142 by controlling data access to relatively slow data storage devices such as the storage devices connected to hard disk controller 158 and data being received from serial I/O device 148 as well as SCSI controller 150.

In an alternative embodiment, a parallel input/output device controller 152 is included in central computer 120 for controlling communications through bus 140 to CPU 142 which are from a printer or other external device using a parallel input/output interface.

Referring now more particularly to Figure 3A which shows a detailed depiction of the elements of a preferred embodiment electro-optical foot scanner 134 includes an optical scan head 160 which moves along a fixed track 162 during the scan process. Scanner 134 also includes a control unit 164 which adjusts the light intensity of the optical scan head 160, the speed at which the optical scan head 160 moves within track 162

during scanning operations, and the flow of data to and from central computer 120 which is coupled to scanner 134 through logical connection 166. Scanner 134 also includes a planar reference surface 170. Other shaped
5 reference surfaces may be substituted for planar reference surface 120 without departing from the teachings of the present invention. For instance, a reference surface generally formed such that it conforms to the bottom surface of a foot may be utilized. During
10 a typical scanning operation a foot to be scanned 168 is placed on one side of reference surface 170 such that the bottom facing surfaces of the foot 168 are proximate the reference surface 170. Optical scan head 160 moves along track 162 along the other side of reference
15 surface 170. In the preferred embodiment control unit 164 consists of a Tokyo Electric Company, Limited optical scanner engine which provides a reference surface which is large enough to accommodate foot sizes up to twenty according to the Brannock measuring system
20 or more specifically 520X220 pixel resolution where each pixel is 5mm square. In addition, the Tokyo Electric Company, Limited engine allows adjustment of the light source intensity used in conjunction with the optical scan head including eight levels of brightness and six
25 levels of contrast. In addition the Tokyo Electric Company, Limited engine provides relatively quick optical scan head movement and therefore relatively quick scanning of the bottom facing surface of foot 168. Further, the central computer 120 includes computational
30 elements for deriving a level heel to foot length, foot width, arch-line, and foot curvature measurement from the data received from foot image data received from scanner 134. It will be appreciated by those skilled in the art that other scanners may be substituted for the
35 particular scanner specified above which meet or exceed the particular specifications of the Tokyo Electric Company, Limited scanner engine.

Referring now to Figures 4A, 4B, and 4C, these figures encompass a flowchart of an example showing the use of the preferred electro-optical foot scanner unit, shown in Figure 2. The flowchart diagram is an example of using electro-optical foot scanner unit from a user's point of view by depicting graphical and textual information which may be shown to a user. This information preferably is shown to a user on a video display screen for review and/or for providing continued navigation through a series of display screens.

Referring now more particularly to Figure 4A, by starting at the open menu/screen display 200 (shown in Figure 6) a user is given a choice to select from a plurality of options including an option to go to a scan foot menu/screen display 202. Upon selecting with an input device 126 (hereinafter referred to as selecting) either scan left foot or scan right foot options from open menu/display screen 200, a scan foot menu/screen display 202 such as the one shown in Figure 7 is presented on the display 122. At this point a user may choose to select scanning of foot which is bare, which has a light sock, or which has a dark sock. After selecting a foot scanning option, a foot is scanned by scanner 134. As the foot is scanned, the information is processed by central computer 120 and the scanned foot image 204 is displayed on display 122. Preferably, as the scanner scans through the length of a particular foot proximate scanner 134, display screen 204 (not shown) displays the portion of the particular foot which has already been scanned. By displaying the image of the scanned foot or screen display 204 as scanner 134 scans the particular foot, a user will focus their attention on the scanned image rather than the length of time that it actually takes to scan the foot, thereby causing the scanning of the foot to be relatively quick from a user's point of view. After scanning and displaying the scanned foot image, open menu/screen

display 200 is presented to the user once again. After scanning both the left and right foot in a substantially similar manner as described above, the user may choose to calculate information about the scanned feet.

5 Referring now more particularly to Figure 4B, upon selecting to calculate the feet information, display scanned foot information menu/screen display 206, shown in Figure 8, is presented on display 122. Menu/screen display 206 displays information about each
10 of the scanned feet including Brannock foot sizes and TWAC™ foot sizes. Menu/screen display 206 further displays an image of the scanned foot which contains overlaid highlight lines including a heel to toe length highlight, center line highlight, heel width highlight,
15 ball width highlight and T point circle highlight. The TWAC™ measurement system includes calculating a length measurement from a foot centerline from the heel to toe, a width line between medial and lateral portions of the foot or between flexion points, an arch-line type, and
20 the angle of curvature of the medial edge and the lateral edge of the foot as determined from a heel point at the base of the heel. Also included in the TWAC™ foot sizing measurement system are calculations of heel width and foot volume.

25 Upon selecting to continue entering information about each foot, enter volume information menu/screen display 208, shown in Figure 9, is displayed on the screen display 122. In an alternative embodiment, the volume information may be automatically measured by the
30 scanner unit and entered into the center computer. A user is prompted to enter a volume number measured by a strap wrapped from the heel to the instep of the foot. After entering the volume information, menu/screen display 210, shown in Figure 10, is presented on display
35 122. A user may select from a plurality of options including correcting volume information or branching to three other software program modules including complete

data module, quick fit module, style fit module. If a user chooses to correct volume information, menu/screen display 208 is presented on display 122 for the particular foot selected.

5 Upon selecting the complete data module, select name option menu/screen display 212, shown in Figure 11, is presented on display 122. Upon selecting to attach the foot scan image information to a file, menu/screen display 214, shown in Figure 12, is presented on display
10 122. A user selects one of five available current customer files to save the customer information under. Upon selecting a particular current customer file to save the scanned foot image information under which automatically assigns new input to a storage file in
15 storage device 130, menu/screen display 216, shown in Figure 13, is presented on screen display 122. The display screen keyboard prompts the user to input a customer name, address, phone number and age by selecting the characters on menu/screen display 13.
20 After completing this information, menu/screen display 218, shown in Figure 14, is presented on screen display 122. After selecting the appropriate customer sex, menu/screen display 220, shown in Figure 15, is presented on display 122. After selecting the
25 particular footwear fit pressure preference, menu/screen display 222, shown in Figure 16, is presented on screen display 122. After selecting the customer sock thickness preference, menu/screen display 224, shown in Figure 17, is presented on display 122. After selecting
30 the particular footwear category which the customer desires to be fitted to, menu/screen display 226, shown in Figure 18, is presented on display 122. After selecting the particular occupation which the customer plans to use the particular footwear for, menu/screen
35 display 228, shown in Figure 19, is presented on display 122. After selecting the particular environmental condition in which the footwear would most frequently be

worn, menu/screen display 230 is presented on display 122. The user shall review the scanned foot image and select the amount of pronation of the foot or select unable to answer this question and central computer 120 shall determine the amount of pronation. After selecting the amount of pronation of the foot by either method, menu/screen display 232, shown in Figure 21, is presented on display 122. At this point the user is prompted to check the customer information for errors and correct such information where needed. The information can be corrected by selecting the incorrect information, returning to that particular menu/screen display, correcting the information and returning to menu/screen display 232.

After indicating that all of the information is correct and that program operation should continue, menu/screen display 212, shown in Figure 11, is once again presented on screen display 122. The user may now choose to select a particular piece of footwear. After selecting to choose a particular piece of footwear, menu/screen display 234, shown in Figure 22, is presented on display 122. Screen display 234 indicates that central computer 120 is loading footwear information into memory. After loading the footwear information into memory, menu/screen display 236, shown in Figure 23, automatically is displayed on display 122. Preferably, a user selects one of the current customer files for which to find footwear.

Alternatively, the user may choose to exit this portion of the program and return to menu/screen display 200, shown in Figure 6. Alternatively, the user may choose to retrieve customer information from a file stored in storage device 130 to use in conjunction with selecting particular footwear. Alternatively, a user may choose to indicate that a quick fit of footwear would like to be accomplished.

Upon choosing to select particular footwear,

menu/screen display 240, shown in Figure 25, is presented on display 122 wherein the user is prompted to either select another person for which to find footwear and automatically returns to menu/screen display 236 or
5 selects to continue operation by running the footwear selection module. Upon choosing to run the footwear selection module, menu/screen display 242, shown in Figure 26, is presented on display 122. Alternatively, if central computer 120 determines that a foot of
10 unusual dimensions has been scanned, the user is presented with menu/screen display 241, shown in Figure 26A, which asks the user to branch directly to the fitting specifications menu/screen display 246, shown in Figure 30, before recommending footwear for the
15 customer.

A priority assignment and sorting algorithm is used to select footwear models and sizes that match the use categories previously selected by the user. The first seven footwear styles selected by the algorithm
20 are presented on menu/screen display 243, shown in Figure 27. The items automatically checked for availability in inventory and those which are available are preferably shown in darker (more definite) characters. Similarly, those which are not available in
25 current inventory are preferably displayed in a lighter (less definite) characters. After selecting to view the remaining suggested footwear, menu/screen display 244, shown in Figure 28, is presented on display 122. The user is asked to select whether or not adjustment to the
30 fitting specifications is necessary. If such adjustments to the fitting specifications are indicated by the user, menu/screen display 246, shown in Figure 30, is presented on display 122. Within menu/screen display 246, indicators 249 are shown next to particular
35 information categories which central computer 120 has calculated most likely to require adjustment to allow more precise fitting of a customer's foot. Thus, a

customer can be prompted to adjust the most likely categories to need adjustment based on the information that central computer 120 has previously been given. Upon selecting a particular category, such as heel width
5 as depicted in menu/screen display 247, shown in Figure 31, the user is prompted to adjust the fitting specifications. After adjusting the fitting specifications, the user selects to continue program operation and menu/screen display 242, shown in Figure
10 26, is presented on display 122.

Alternatively, if from menu/screen display 244, shown in Figure 28, a user indicates that no adjustments to the fitting specifications are necessary, menu/screen display 245, shown in Figure 29, is presented on display
15 122. The user may choose to print a hard copy of the suggested footwear on printer 128. The user may select three different printout formats including complete hard copy of suggested footwear information for footwear in current inventory, only the names of particular
20 suggested footwear, or all suggested footwear without an inventory check for current availability. After printing the desired information, the user preferably selects to continue program operation and branch point menu/screen display 248, shown in Figure 32 is presented
25 on display 122. From this menu/screen display, a user may choose to select a shoe for the next person, make changes to current data, return to the fit screen control program, branch to the footwear product catalog, branch to the last overlay viewing program module, or
30 branch to the fit aid recommendations program module.

Upon indicating a desire to select a shoe for the next person, central computer 120 branches to menu/screen display 236, shown in Figure 23, and continues normal operation from that point. Upon
35 indicating to make data changes, central computer 120 branches to menu/screen display 246, shown in Figure 28, and continues normal operation from that point. Upon

indicating a desire to branch to fit/scan control, central computer 120 branches to menu/screen display 200, shown in Figure 6, and continues normal operation from that point. Alternatively, upon indicating a
5 desire to review the footwear product catalog, menu/screen display 260, as shown in Figure 38, is presented on display 122 and central computer 120 continues normal operation from that point in the flow diagram shown on Figure 4C. Alternatively, upon
10 indicating a desire to view last overlay, menu/screen display 272, shown in Figure 44, is presented on display 122 and normal operation of central computer 120 is continued as shown in the flow diagram shown in Figure 4C. Alternatively, upon indicating a desire to branch
15 to the fit aid recommendations module, menu/screen display 282, shown in Figure 49, is presented on display 122 and central computer 120 continues normal operation from that point as shown in program flow diagram Figure 4A.

20 Alternatively, from menu/screen display 210, shown in Figure 10, a user may choose to enter the quick fit module. The quick fit program module is designed to work with only scan data and without customer information. After choosing to enter the quick fit
25 module, menu/screen display 234, shown in Figure 22, is presented on display 122. Menu/screen display 234 indicates that central computer 120 is loading footwear information into memory. After accomplishing the loading of such information, menu/screen display 238,
30 shown in Figure 24, is presented on display 122. After selecting the sex of the quick fit customer, screen display 240 is presented on display 122 and central computer 120 continues on in the program flow as indicated in Figure 4B and as previously detailed in the
35 discussion of the complete data module.

Alternatively, as shown in menu/screen display 210, shown in Figure 10, the user may select to enter

the style fit module. Upon selecting to enter the style fit module, menu/screen display 250, shown in Figure 33, is presented on display 122. The user is prompted to select a particular style of footwear which they would like to be fitted for. For instance, a user may choose to pick a particular shoe from the selections shown in menu option entitled page 1. After such selection, menu/screen display 252, shown in Figure 34, is presented on display 122. A user is prompted to select a particular style of footwear for which to be fitted. After selecting a particular style of footwear, menu/screen display 254, shown in Figure 39, is presented on display 122. Menu/screen display 254 provides particular information about the chosen style of footwear including sizes and widths available according to the Brannock measurement system and particular features of this footwear, including liner, insole, insulation, dressing, construction and sole. A user may choose to return immediately to one of the particular style pages such as page 1, shown in menu/screen display 252, return to the main style menu/screen display 250, or to fit this style.

Upon choosing to fit this particular style, menu/screen display 256, shown in Figure 36, is presented to the user. After entering the particular sex of the customer, last overlay menu/screen display 258, shown in Figure 37, is presented on display 122. The last overlay menu/screen display 258 shows how the particular chosen style of footwear will fit on the currently selected scanned foot information. The user may move the style last overlay outline 259 with respect to the scanned foot image 257 by selecting movement indicator menu options 255. After viewing the particular style last overlay 259 on the scanned foot, the user selects to return to menu/screen display 250. Subsequently, from menu/screen display 250, the user may choose to return to menu/screen display 200, shown in

Figure 6, or fit another footwear style to the particular foot currently selected.

Alternatively, as shown in menu/screen display 210, shown in Figure 10, the user may select to enter
5 the catalog module. Upon selecting to enter the catalog module, menu/screen display 260, shown in Figure 38, is presented on display 122. Through menu/screen display 260, a user may browse through the current catalog listings of footwear according to different styles
10 without having previously selected customer information to be used in conjunction with selecting a particular style. The styles available may be presented on display 122 in textual menus as shown in menu/screen display 260. Alternatively, the styles may be shown in
15 graphical depictions of particular styles of shoes available such as hiking boots, running shoes, service shoes, work boots, etc. For example, a user may choose to view shoes from page 3, as shown in menu/screen 262, shown in Figure 39. The list of particular footwear may
20 be shown in a textual or graphical manner as discussed above. Such that miniature graphical representatives of footwear may be shown in place of the textual listing of the name of the footwear. After viewing the list of particular footwear listed on catalog page 3, a user may
25 choose to view a particular piece of footwear. Upon choosing a particular piece of footwear, menu/screen display 264, shown in Figure 40, is presented on display 122. Information about the particular footwear selected is presented to the user including sizes and widths
30 available according to the Brannock sizing system and particular features of this particular footwear. A user may choose to return to the same or different pages of the catalog or to the main menu catalog screen 260, shown in Figure 38. Alternatively, a user may choose to
35 more closely view the particular footwear selected. In the preferred embodiment, menu/screen display 264 includes miniature pictures of the side 263, top 263'

and bottom 263" views of the particular footwear selected. A user may choose to more closely view one of these particular views of the footwear selected. Upon choosing to more closely view one of the several views of the selected footwear, one of several larger views of that particular footwear is presented on display 122. For example, screen display 266, 268, and 270, as shown in Figures 41, 42 and 43, respectively, are presented on display 122.

Alternatively, as shown in menu/screen display 200, shown in Figure 6, the user may select to enter the last overlay module. Upon selecting to enter the last overlay module, menu/screen display 272, shown in Figure 44, is presented on display 122. After selecting the particular shoe size of the last to be overlaid on the scanned foot, menu/screen display 274, shown in Figure 45, is presented on display 122. After selecting the width of the last to be overlaid on the scanned foot, menu/screen display 276, shown in Figure 46, is presented on display 122. After indicating the last series (style of footwear) to be overlaid on the scanned foot, menu/screen display 278, shown in Figure 47, is presented on display 122. The user is prompted to change any of the last overlay parameters, return to the main menu/screen display 200 through branch 302, or to overlay the last outline on the scanned foot image. Upon choosing to display the last overlay on the scanned foot image, menu/screen display 280, shown in Figure 48, is presented on display 122. The outline of the last may be moved with respect to the scanned foot image through the use of overlay movement menu options so that a user can see how a particular style and size of footwear will fit on the particular scanned foot. After viewing how the particular selected last fits the scanned foot image and choosing to exit menu/screen display 280, menu/screen display 272, shown in Figure 44, is presented on display 122 and central computer 120

continues normal operation from that point as shown in the program flow diagram Figure 4C.

Alternatively, a hidden option on menu/screen display 200, shown in Figure 6, is available. Upon
5 activation of the hidden menu option in menu/screen display 200, central computer 120 operates interactively with remotely stored inventory data 124 as shown in Figure 4C. Upon selection of the hidden option, menu/screen display 330, shown in Figure 65, is
10 presented on display 122. The user is prompted to update inventory information. Upon choosing the first updating step, including polling a remotely located computer including inventory data 124, menu/screen display 332, shown in Figure 66, is presented on display
15 122 while central computer 120 receives information from remotely located inventory data 124. After receiving the inventory data 124, menu/screen display 330 is presented on display 122. Upon selecting the second updating step of updating quick access files,
20 menu/screen display 334, shown in Figure 67, is presented on display 122. After updating the quick access files, menu/screen display 330 is presented on display 122. Preferably, the user chooses to return to main open menu/screen display 200, shown in Figure 6,
25 and central computer 120 continues on in the program flow as indicated in Figure 4A.

Alternatively, from open menu/screen display 200, shown in Figure 6, or through branch point 310, the fit aids module may be entered. Upon entering the fit
30 aids module, menu/screen display 282, shown in Figure 49, is presented on display 122. If a customer file has not been previously selected, menu/screen display 284, shown in Figure 50, is presented on display 122 so that a user may select a particular customer for which to
35 suggest fit aids. The user may choose to enter a current customer number, return to open main menu/screen 200, or retrieve customer information from storage

device 130. Alternatively, if a particular customer file has already been selected prior to entering menu/screen display 282, then menu/screen display 284 is not shown on display 122. In either situation, after a particular customer file has been selected, branch point menu/screen display 286, shown in Figure 52, is presented on display 122. From branch point menu/display screen 286, the user may choose to display a foot comparison of the selected customer foot image compared to a standard foot. Upon selecting foot comparison display, menu/screen display 288, shown in Figure 52, is presented on display 122. Information concerning the variation of the particular customer foot from a standard foot is given. For instance, in the example foot shown in menu/screen display 288, the selected foot has a wide heel width, low pronation and extra low volume. After viewing the foot comparison, menu/screen display 286 is returned to for continued program operation.

Alternatively, from branch point menu/screen display 286, a user may choose to go to menu/screen display 284 and select a different customer file. Alternatively, from branch point menu/screen display 286, the user may choose to select fit aids. Upon choosing to select fit aids, menu/screen display 290, shown in Figure 53, is presented on display 122. Menu/screen display 290 provides fit aid recommendations for the particular selected customer foot including items such as a heel cup, heel cushion, wedge, arch support, forefoot cushion, volume adjust shim, and the like. In addition, the prices for each of the fit aid products are provided for customer feedback. Further, suggested socks and prices are presented so that a user may choose the best socks available in the retail store based on previously entered customer preferences for the particular foot. After displaying all of the recommended fit aids for the particular customer, a user

may generate a hard copy on printer 128 of the suggested fit aids, draw a picture of the particular suggested fit aids or branch to an alternative branch point menu.

Upon choosing to display suggested fit aids for the

5 particular customer, a menu/screen display 292, like the one shown in Figure 54, is presented on display 122. In menu/screen display 292, only the suggested fit aids for the particular selected customer foot image file are shown. For instance, in the example shown, the

10 suggested fit aids include a Red Wing insole, heel cup, heel cushion, metatarsal support and volume adjust shim. After viewing the suggested fit aids for the selected customer fit image file, menu/screen display 290 is redisplayed.

15 Upon choosing to go to a return menu, branch point menu/screen display 294, shown in Figure 55, is presented on display 122. From the branch point menu/screen display 294, the user may choose to return to the beginning of the fit aid module through branch

20 point 310 and choose fit aids for the next customer. Alternatively, a user may choose to adjust the fitting specifications through the use of menu/screen display 295, shown in Figure 56, which functions in a similar manner to the adjust fitting specification operation

25 described for menu/screen displays 246 and 247, shown in Figures 30 and 31, respectively. Alternatively, a user may choose to select a particular style of footwear by branching to the style fit module through branch point 312. Alternatively, a user may choose to view the

30 footwear catalog by branching through branch point 306 to the catalog module. Alternatively, a user may choose to return to the fit aid recommendations menu/screen display 290 and continue program operation through central computer 120.

35 Alternatively, from open menu/screen display 200, shown in Figure 6, a user may choose to enter the file locator module. Upon entering the file locator

module, menu/screen display 296, shown in Figure 57, is presented on display 122. From menu/screen display 296, a user may choose to search storage device 130 by one of several search methods including searching by customer
5 number, alphabetical search, the date that the customer file was first entered, and a simple incremental search. In addition, from menu/screen display 296, the user may generate a label and print a hard copy on printer 128 and return to open menu/screen display 200. After
10 choosing the particular search method, for instance by an alphabetical search, menu/screen display 298, shown in Figure 58, is presented on display 122. The user is prompted to input a string of characters which is to be searched for in storage device 130. After entering the
15 string of characters to be searched for, a menu/screen display 300, such as the one shown in Figure 59, is presented on display 122. Menu/screen display 300 preferably displays the first customer file record found which matches the search string as well as the preceding
20 two customer file records and the following two customer file records. In addition, a user may choose to find the next customer file record containing the search character string or exit to menu/screen display 296.

In alternative embodiment, as shown in Figure
25 5, footwear information can be displayed in a plurality of different ways. In this example, ski boot footwear is being displayed. However, it will be appreciated by those skilled in the art that the principle shown herein may be applied to all forms of footwear. Ski boot
30 footwear information is displayed in menu/screen display 320 as shown in Figure 60. Ski boot information includes various parameters which are utilized by the ski boot industry including flex index with volume pronation and several features of the particular ski
35 boot including buckle type fit material, liner cover, liner features, foot bed type, foot bed adjustability, shell type, shell materials, and shell features. From

menu/screen display 320, a user may choose to view the particular ski boot by selecting the computer graphic image of the ski boot. After selecting the computer graphic image of the ski boot, menu/screen display 328, as shown in Figure 64, is presented on display 122. After viewing the ski boot image, the user returns to menu/screen display 320.

In addition, the user may choose to view an alternative last overlay tailored for footwear having sidewall liners, or liners and an outer shell. After choosing to view this alternative last overlay, menu/screen display 322, shown in Figure 61, is presented on display 122. The user may select a particular boot internal perimeter outline (BIPO) to overlay the scanned foot image currently selected by selecting a particular BIPO size. After selecting the particular BIPO size to overlay on the image 323 of the scanned foot currently selected, menu/screen display 324, shown in Figure 62, is presented on display 122. As shown in menu/screen display 324, a double-lined boot image 325 (also referred to as a liner region image) is overlaid on a scanned foot image. By manipulating menu options 321, the double-lined boot image outline 325 may be moved with respect to the foot image. After placing the boot image 325 precisely, a user may choose to show the particular pressure points between the boot and scanned foot image. Upon choosing to view the pressure points, menu/screen 326, as shown in Figure 63, is presented on display 122. Menu/screen display 326 displays a filled boot outline image 327 between the two-lined image 325 shown in menu/screen display 324. In addition, portions of the foot image 323 which are between the inner (the line generally nearer the foot image) and outer lines (the line generally further from the foot image) of the filled boot image 257 are highlighted so that a user may discern the amount of pressure a foot would encounter from the inner lining

pressing against the foot. This allows the user to adjust the size of the boot desired to properly fit the scanned foot with an optimally chosen size of boot and liner in accordance with the pressure preferences for the owner of the particular foot which has been scanned. From menu/screen display 326, a user may choose to adjust the size of the boot image by returning to menu/screen display 322 or exit the display footwear information module.

Although the present invention has been described and illustrated with a certain degree of particularity, it is understood that the present disclosure of embodiments has been made by way of example only and that numerous changes in arrangement and combination of parts as well as steps may be resorted to by those skilled in the art without departing from the spirit and scope of the present invention as claimed. In particular, it will be appreciated by those skilled in the art that a plurality of foot measurement techniques are available for use in such a system, including the Brannock measurement system and the TWAC™ measurement system. In addition, the hardware and software components used for the present invention may be modified in view of future technological improvements including, but not limited to, faster computing devices, higher resolution displays and improved electro-optical scanners or other devices for capturing the three-dimensional image of a foot.

WHAT IS CLAIMED IS:

1. An integrated system for footwear visual image cataloging and selection, comprising:
 - 5 a) foot measuring means for electronically measuring a customer's foot;
 - b) data processing means logically coupled to the foot measuring means for receiving foot measurement data, customer identification data, and customer
10 preference data;
 - c) storage means logically coupled to the data processing means for storing a footwear catalog comprising footwear images and footwear related data in a manner which allows rapid selection and retrieval by
15 the customer;
 - d) visual display means for displaying images and data relating to the measured foot, suggested footwear images, and suggested footwear related data stored in the footwear catalog, the suggested footwear
20 images and footwear related data being automatically selected by matching the customer preference data and foot measurement data to footwear related data in the footwear catalog.
- 25 2. The system according to claim 1 wherein the foot measuring means comprises an electro-optical scanning mechanism.
3. The system according to claim 1 wherein the
30 visual display means comprises a high resolution graphics display.
4. The system according to claim 1 wherein the displayed images comprise digitized images of available
35 footwear.

5. The system according to claim 1 wherein the visual display means displays suggested footwear fit aid components by utilizing the customer preference data, the foot measurement data, and the footwear related data.

6. The system according to claim 1 wherein the data processing means comprises customer data adjustment means for adjustment of customer identification data and customer preference data.

7. The system according to claim 1 wherein the storage means stores customer identification data and customer preference data for each customer.

8. The system according to claim 1 further comprising input means for providing relative movement between the image of the selected footwear and the measured foot image to electronically determine the actual fit of the selected footwear with the measurement foot.

9. A system for visually displaying a foot image and overlaying an image of selected footwear, comprising:

a) visual display means for displaying a measured foot image and an image of a selected footwear; and

b) input means for providing relative movement between the image of the selected footwear and the measured foot image to electronically determine the actual fit of the selected footwear with the measured foot.

10. A system for visually displaying a foot image and overlaying of an image of selected footwear, comprising:

a) measuring means for electronically measuring a foot and for providing foot measurement data to a visual display;

b) footwear database means for providing
5 selected footwear data to the visual display;

c) the visual display being logically coupled to the measuring means and to the footwear database means, the visual display comprising means for receiving foot measurement data from the measuring means and for
10 displaying the foot measurement data as a foot image, the visual display further comprising means for receiving selected footwear data from the footwear database means and for displaying a selected footwear image; and

d) input means for providing relative movement
15 between the image of the selected footwear and the measured foot image as displayed on the visual display thereby enabling electronic determination of the actual fit of the selected footwear with the measured foot.

20

11. An integrated method of footwear visual image cataloging and selection comprising the steps of:

a) measuring a customer's foot to provide foot sizing data suitable for electronic transfer to a data
25 processing device;

b) inputting customer information and preference data to a data processing device;

c) storing a footwear catalog comprised of images and data related to available footwear, the
30 footwear catalog being stored in a storage device;

d) automatically selecting suggested footwear by matching customer foot sizing data and customer preference data to suitable and available footwear in the stored footwear catalog; and

e) visually displaying images and data
35 relating to the measured foot and suggested footwear.

12. A method of foot shape imaging and overlay comprising the steps of:

- a) electronically measuring a foot and producing an image of the foot on a visual display;
- 5 b) selecting footwear for use with the measured foot from an electronic footwear selection database; and

c) displaying an inner shape image of the selected footwear on the visual display in overlaying
10 relation to the foot image to electronically determine whether the selected footwear will actually fit on the measured foot.

13. The method according to claim 12 further
15 comprising the step of providing manipulating means for electronically moving the selected footwear inner shape relative to said foot image.

14. A method of foot shape imaging and overlay
20 comprising the steps of:

- a) electronically measuring a foot and producing an image of the foot on a visual display;
- b) selecting footwear for use with the measured foot from an electronic footwear selection
25 database; and

c) displaying a footwear liner region image defined by a footwear inner perimeter image and a footwear liner image on the visual display in overlaying
relation to the foot image to electronically determine
30 whether the selected footwear will actually fit on the measured foot.

15. The method according to claim 14 further
comprising the step of assigning a color hue to a
35 portion of the displayed foot image which is located within the liner region image so that the color of the foot image portion within the liner region image is

different from the color of the foot image not within
the liner region image.

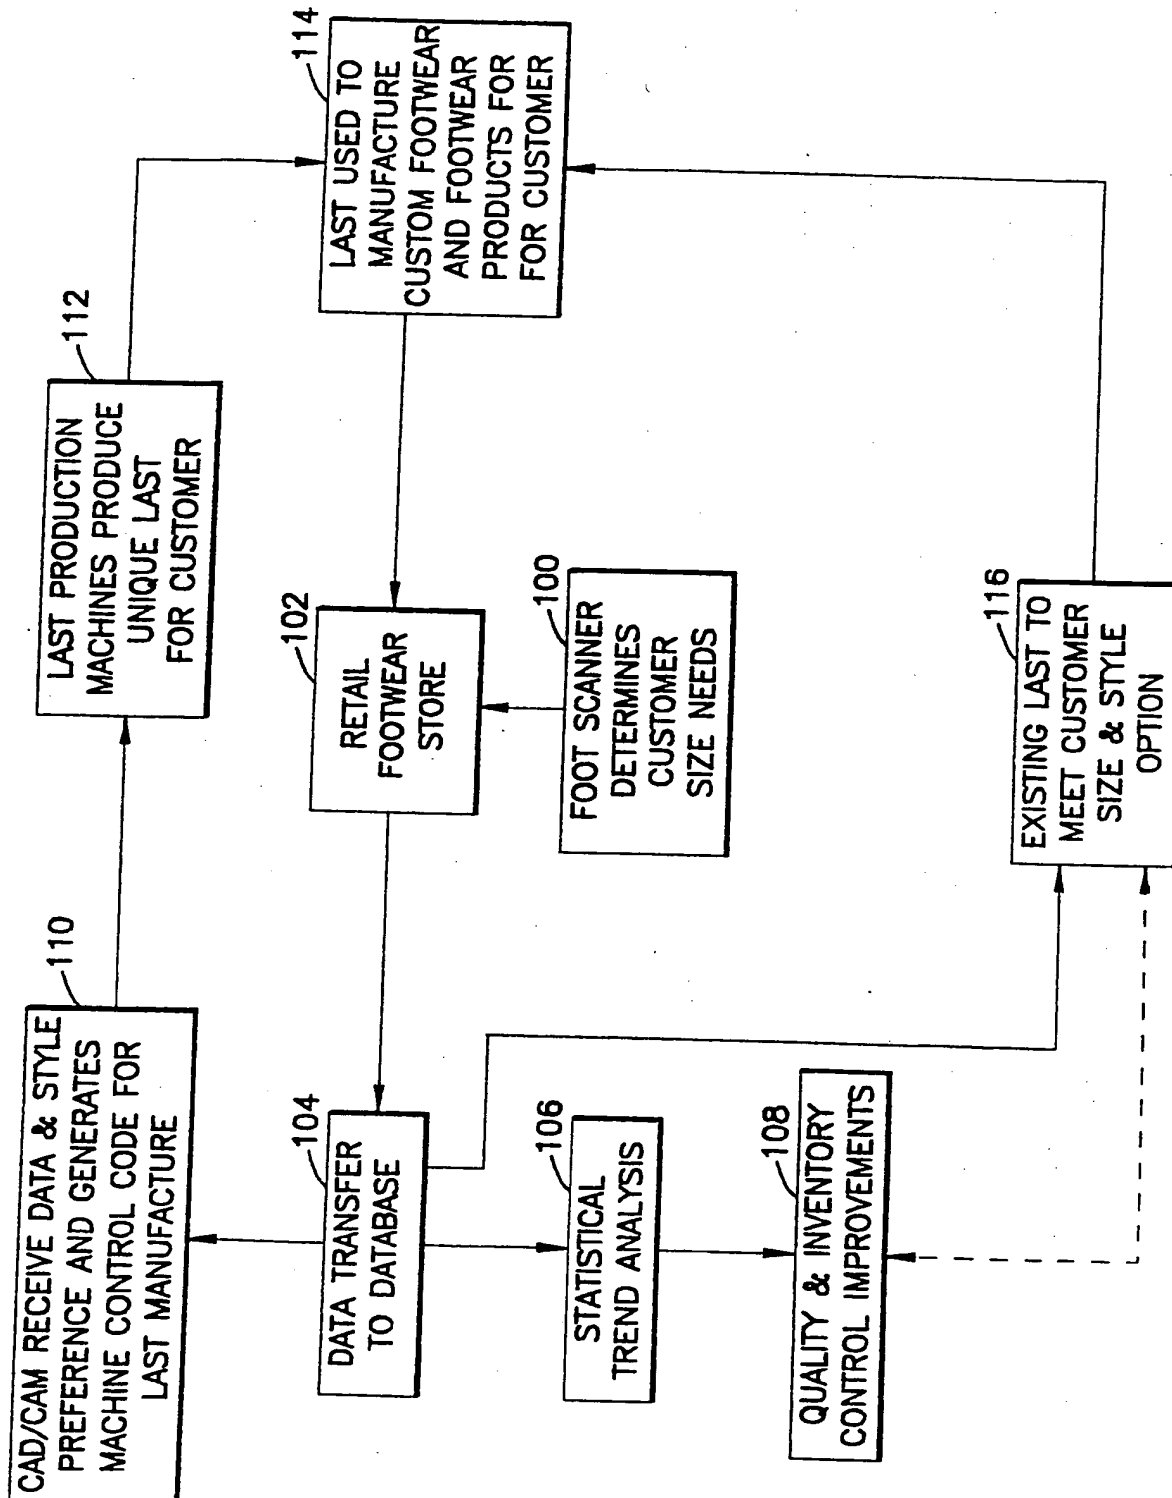


FIG. 1

FIG. 2

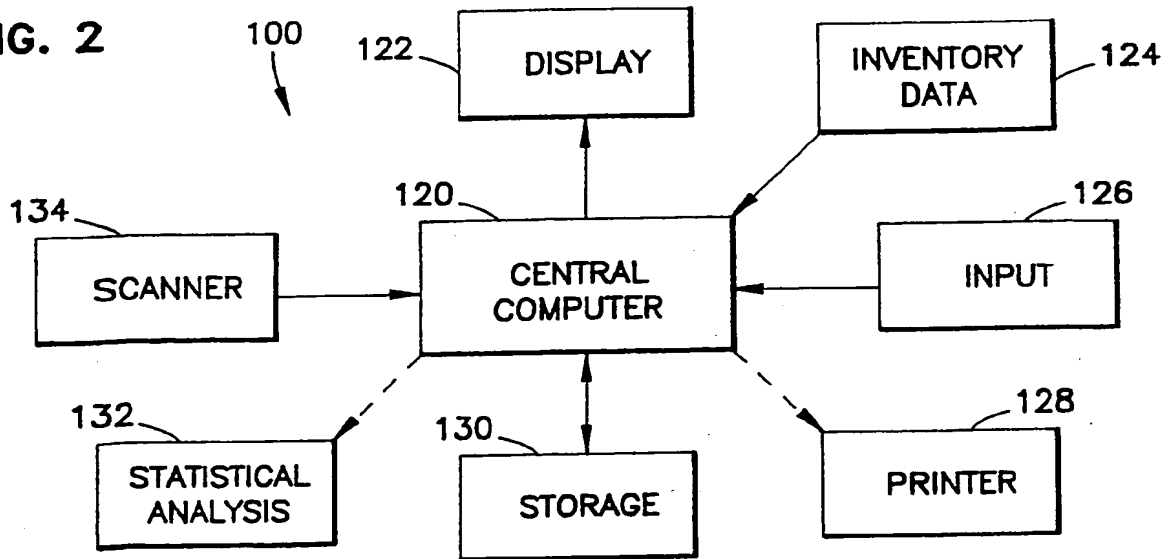
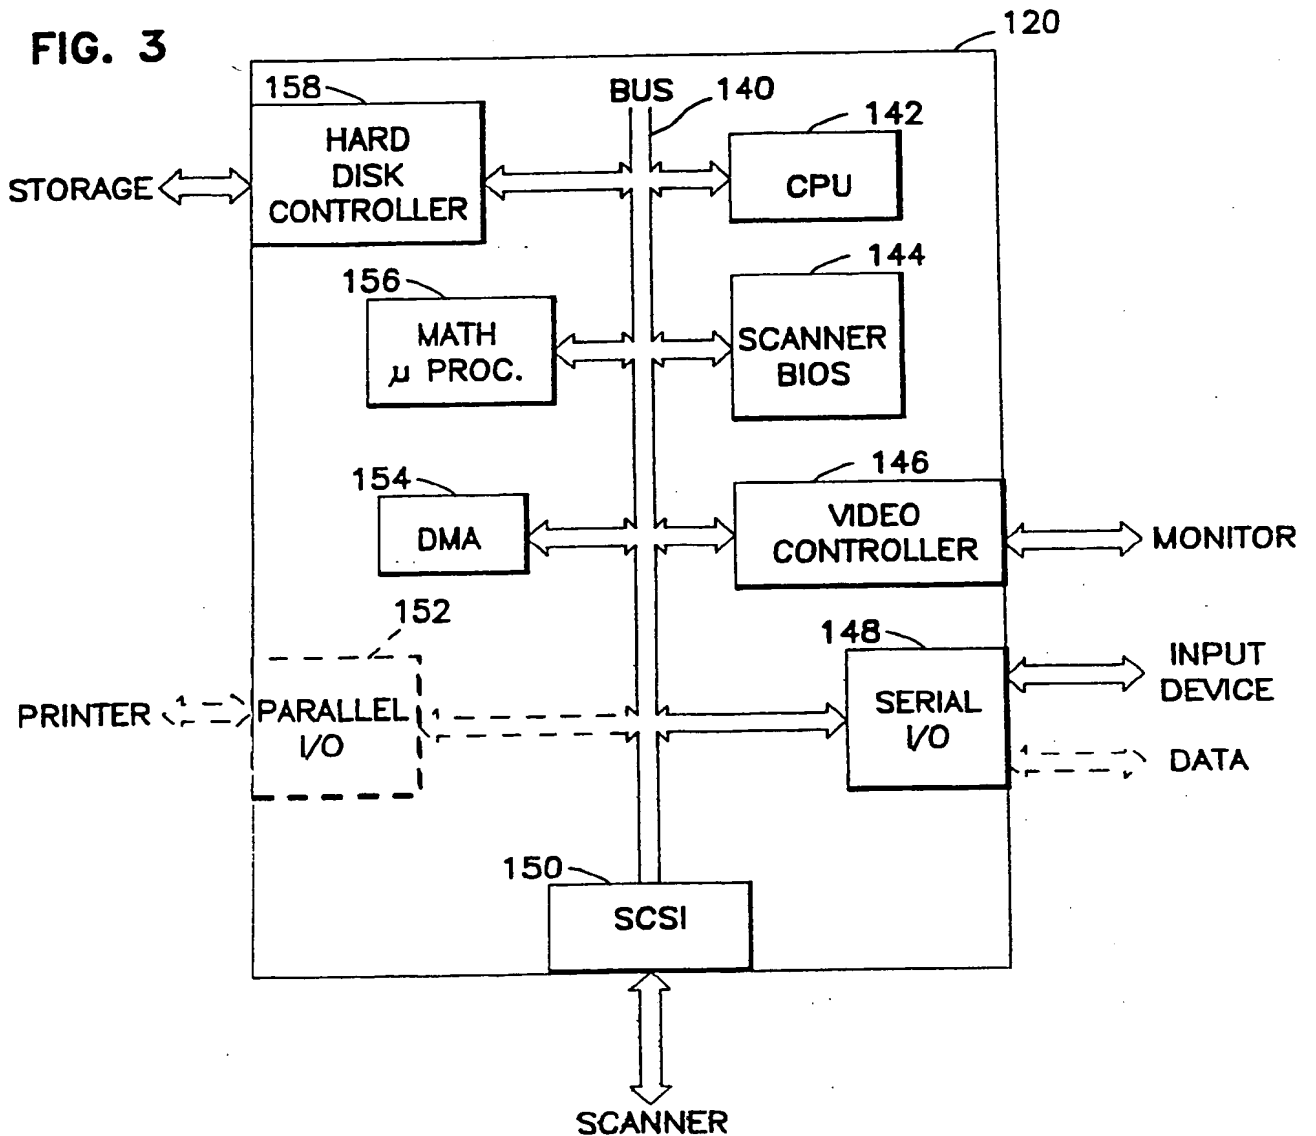


FIG. 3




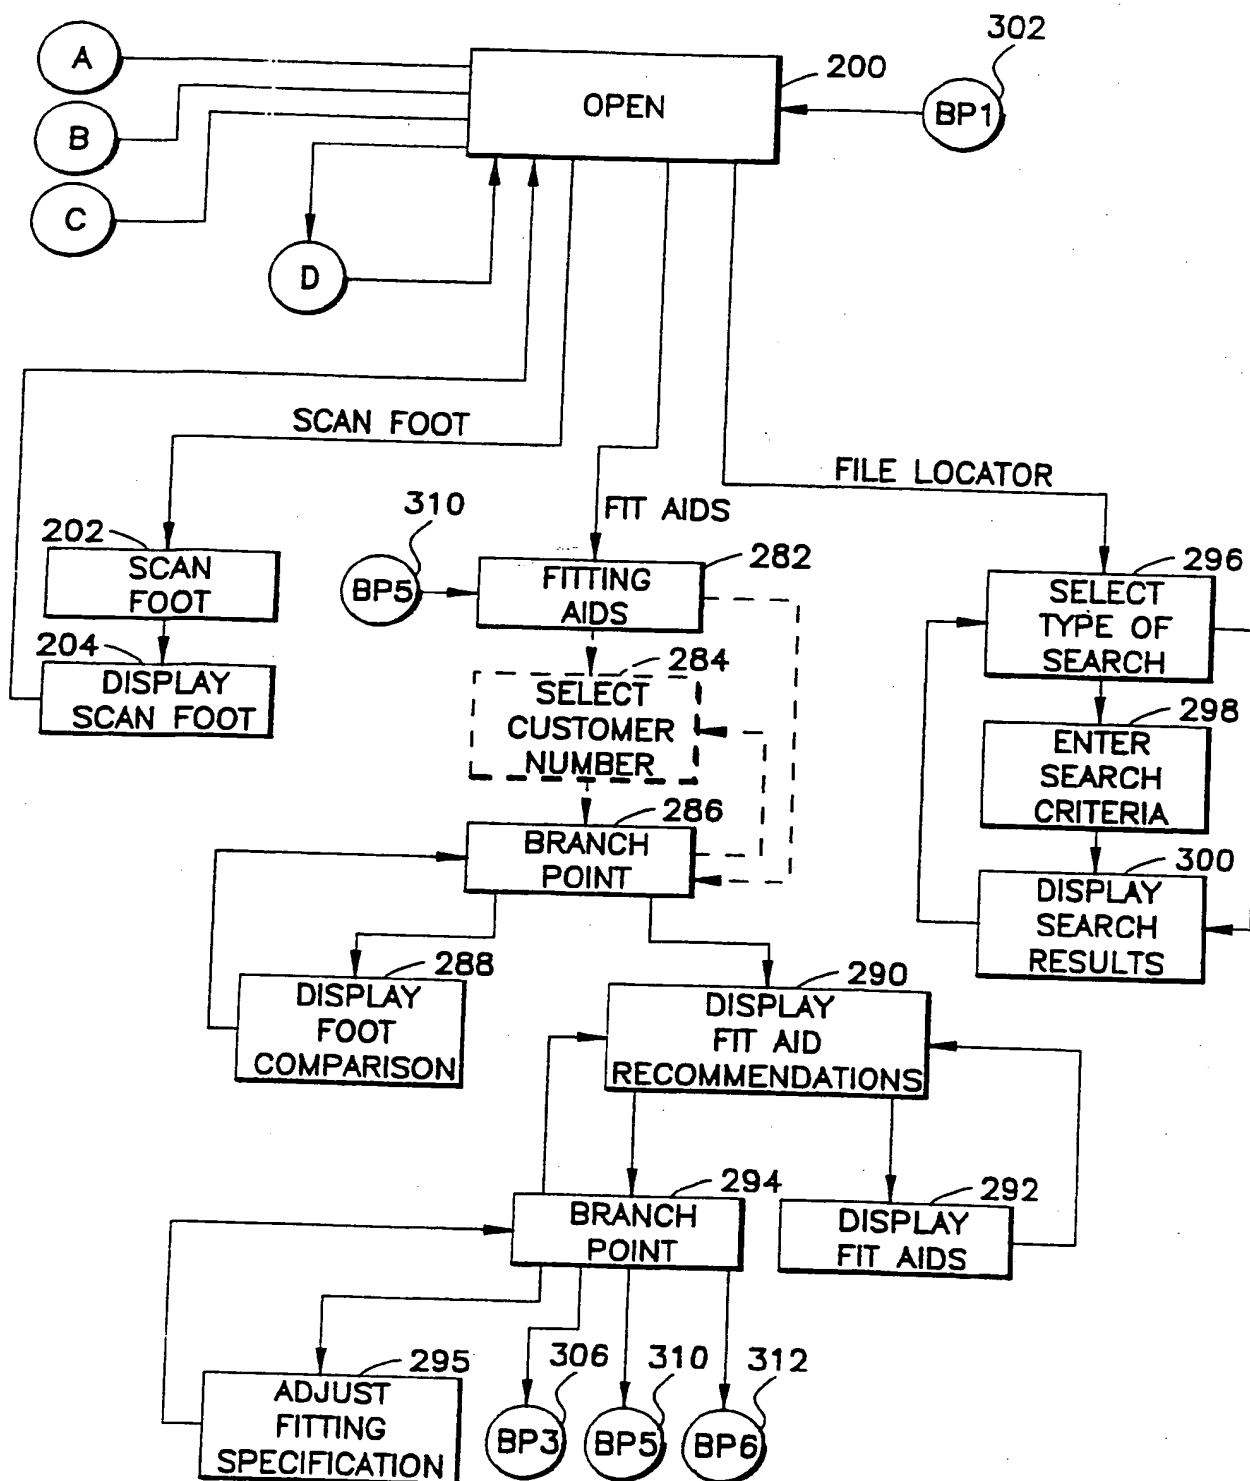


FIG. 4A

FIG. 4B

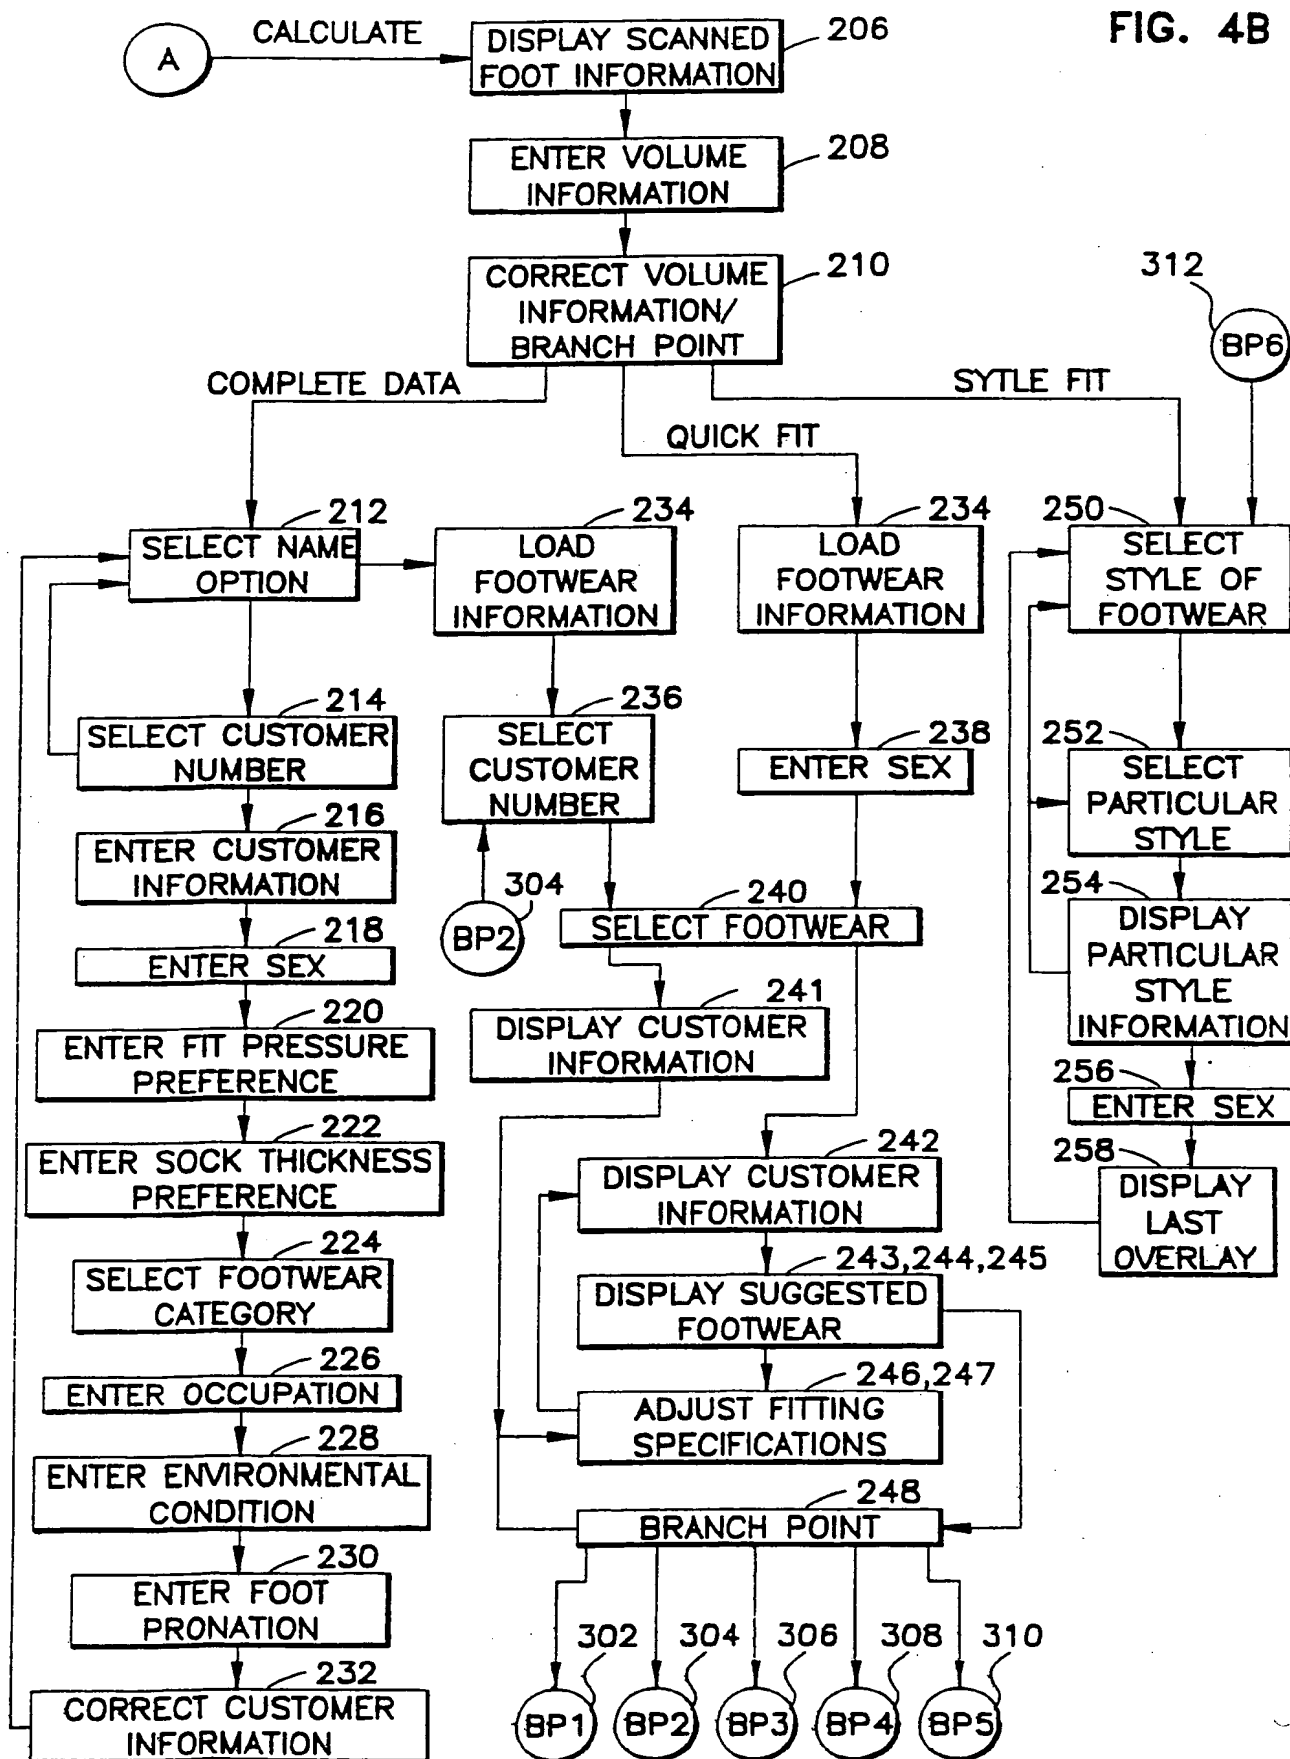

5 / 3 8



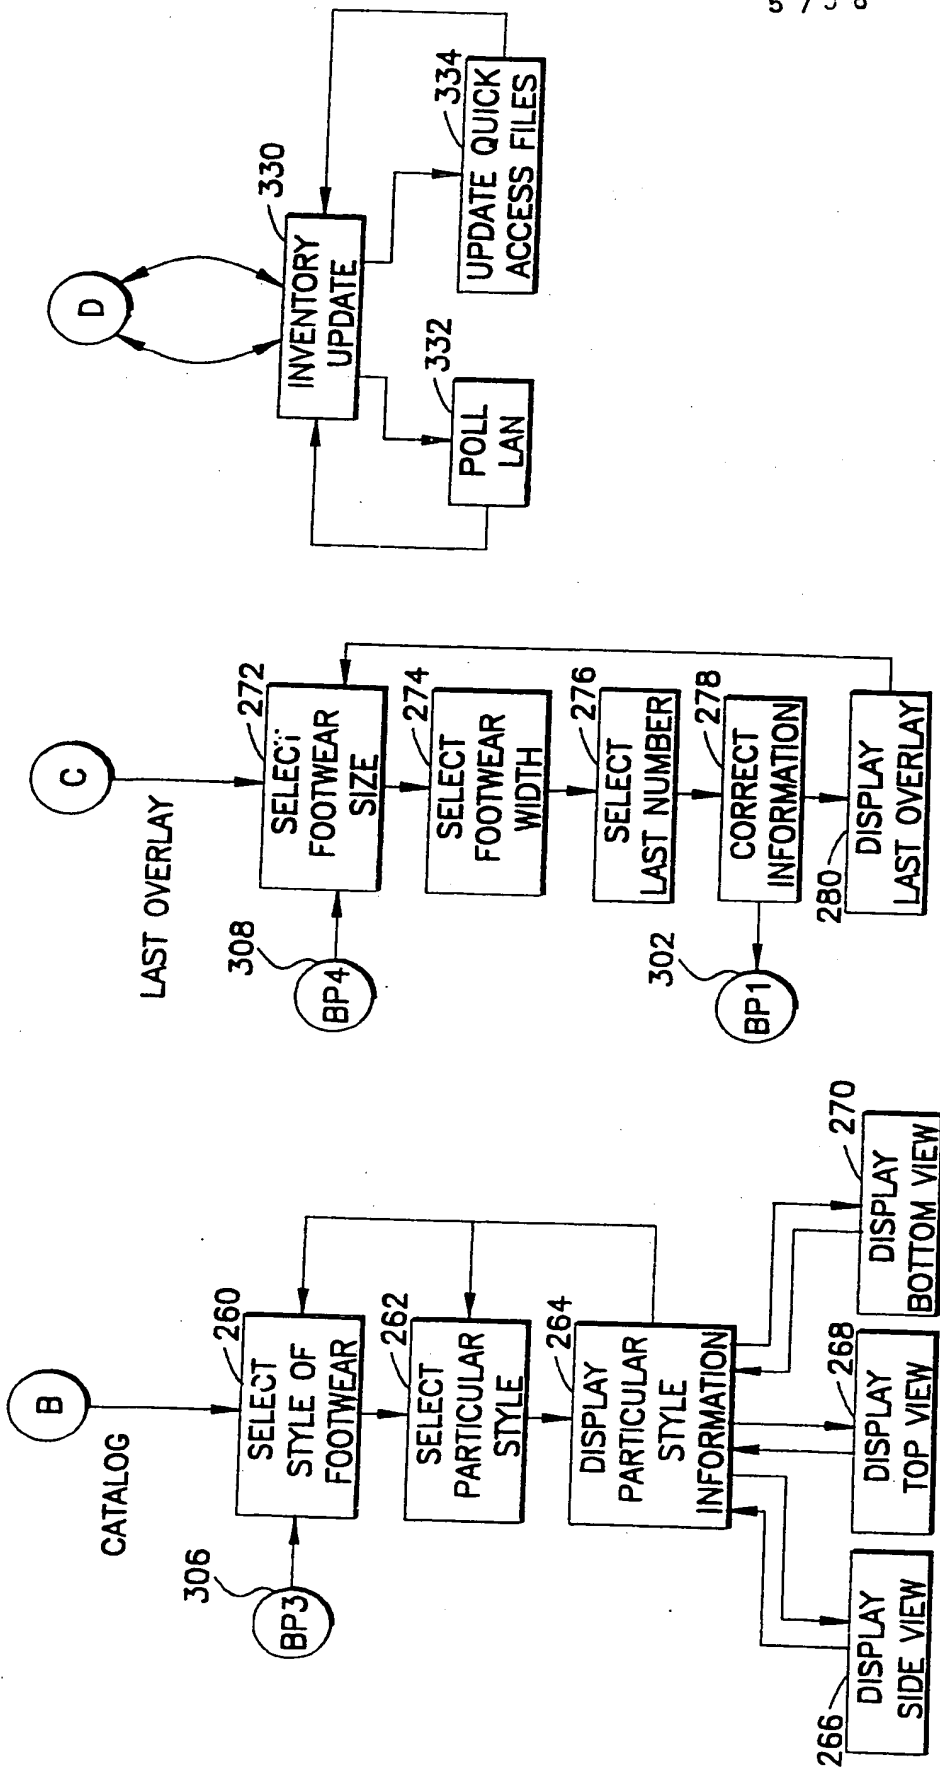


FIG. 4C

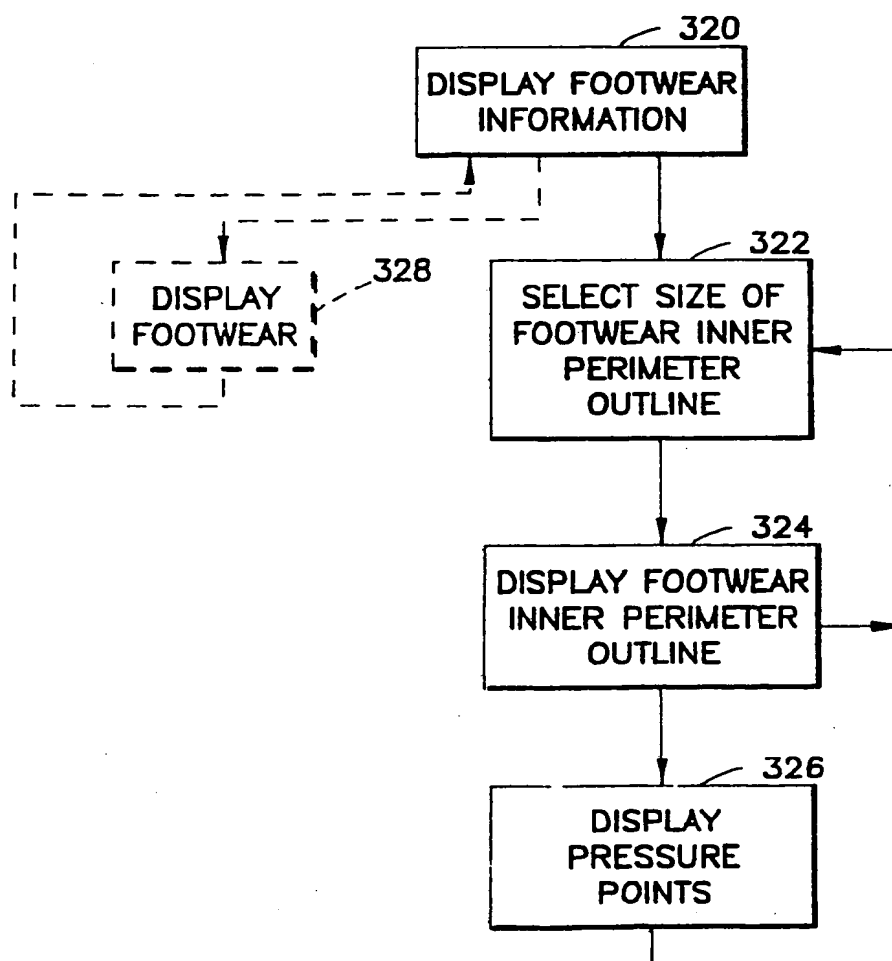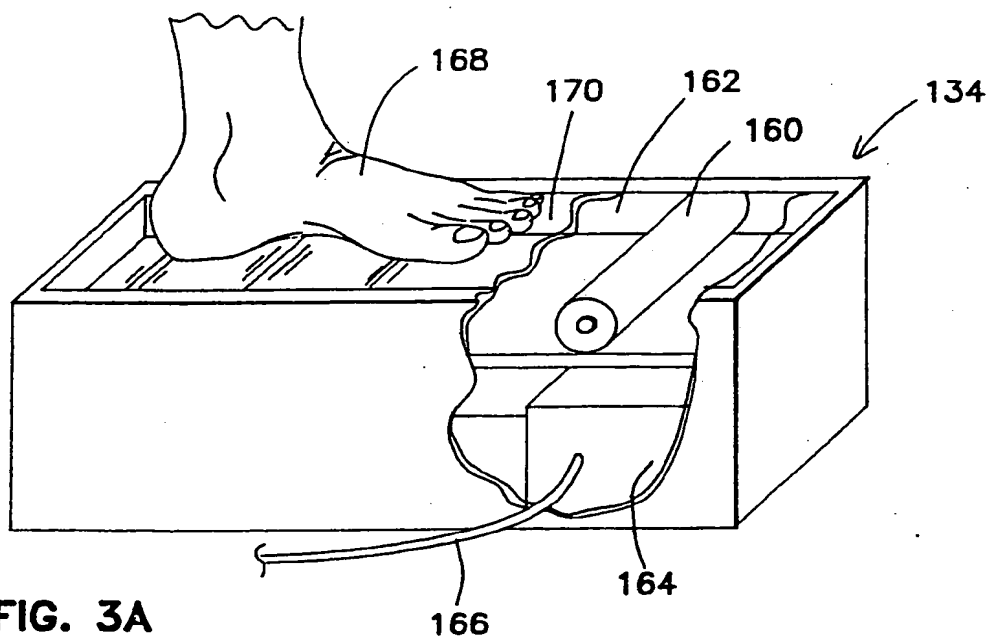

7 / 3 8

FIG.6

200


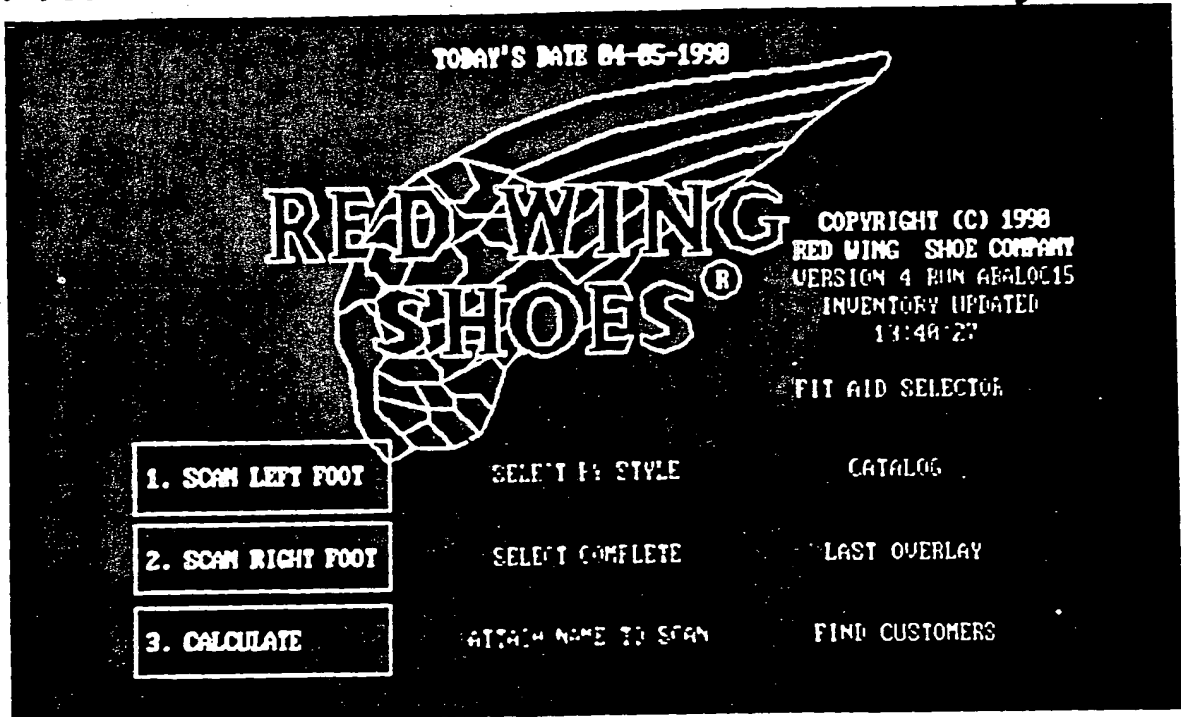


FIG.7

202

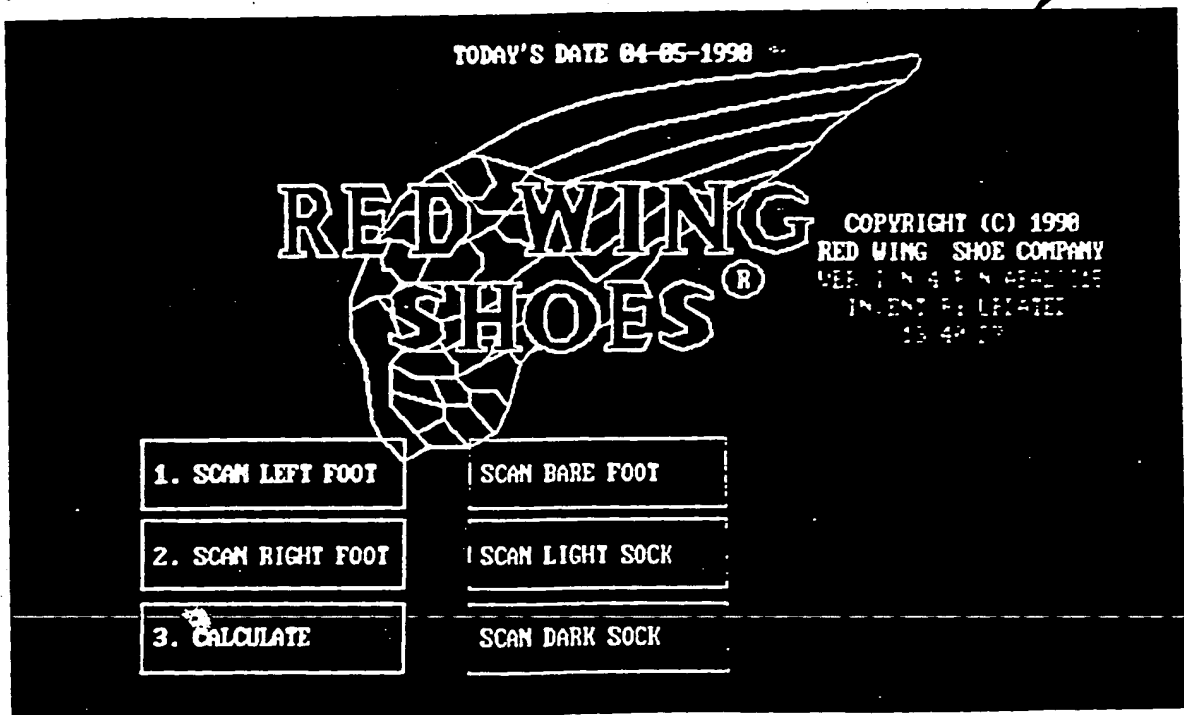

8 / 3 8

FIG.8

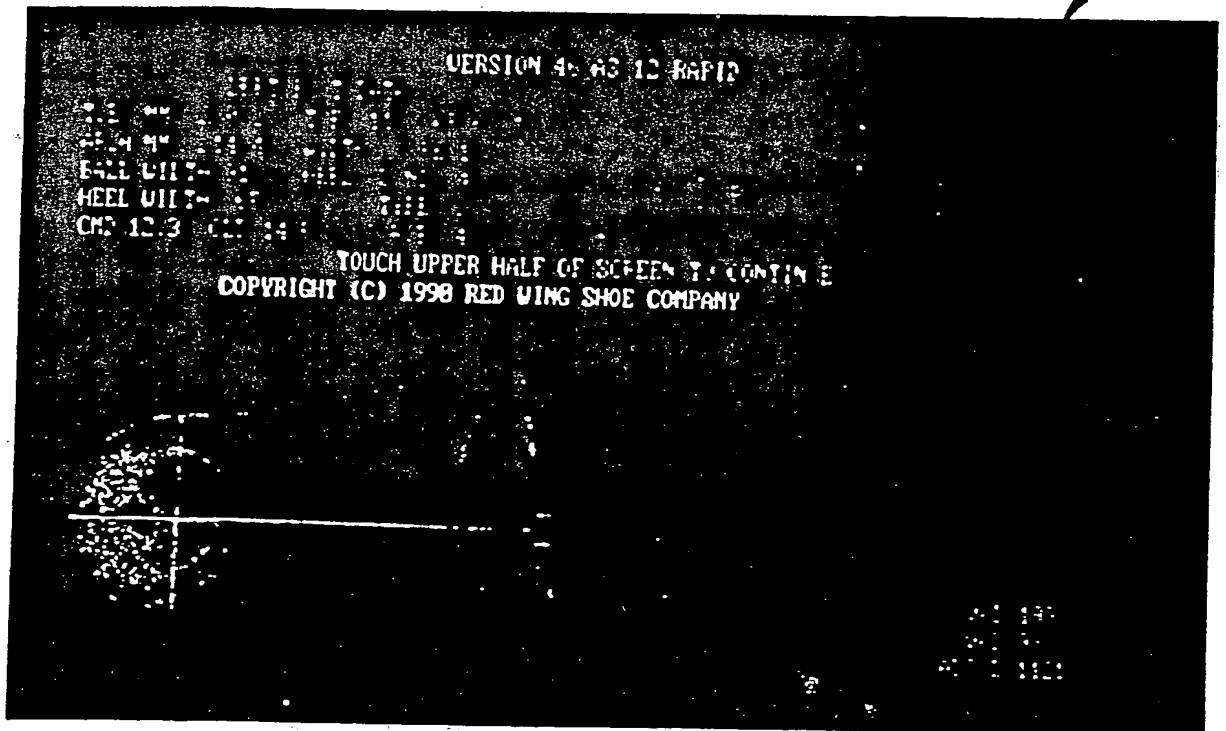


FIG.9

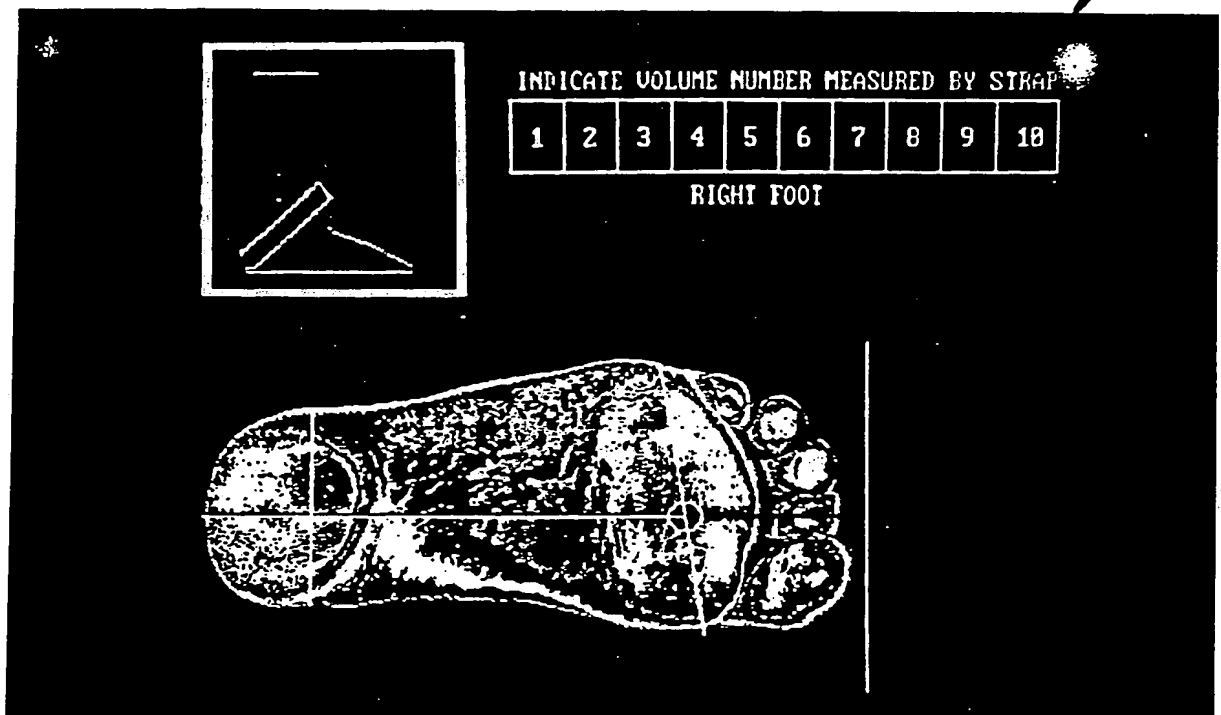


FIG.10


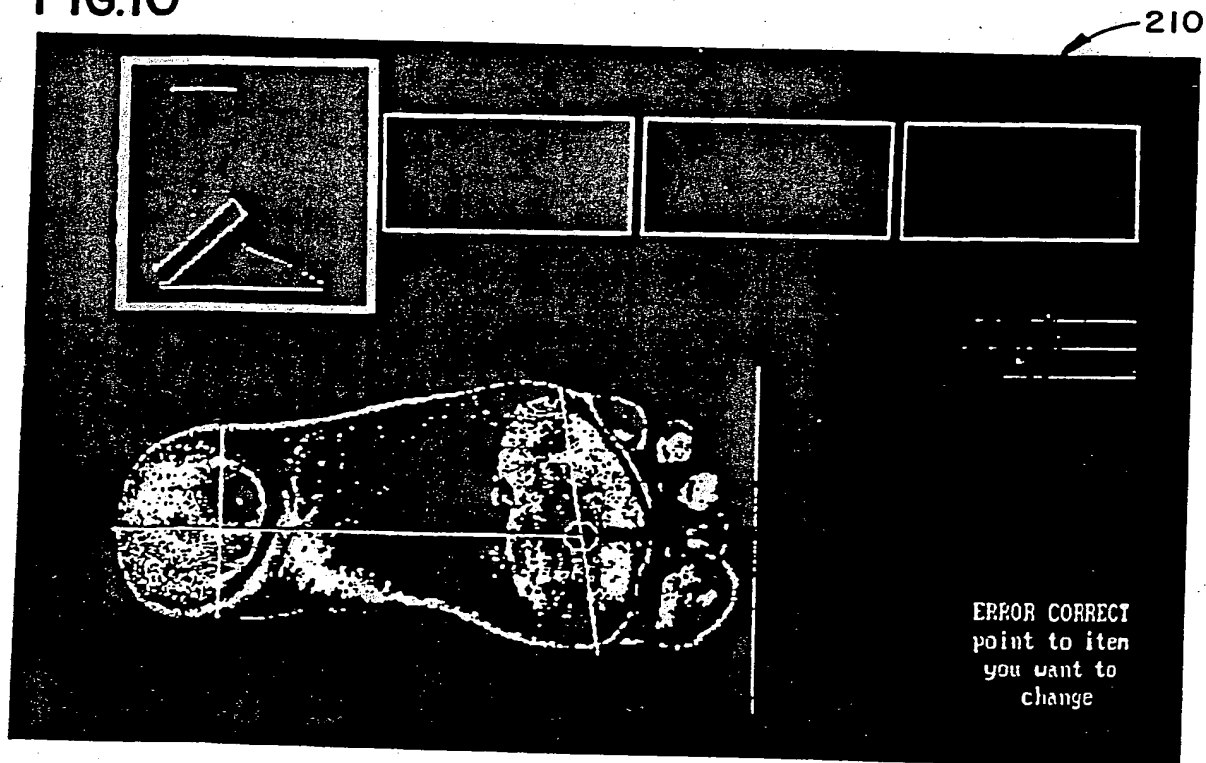


FIG.11

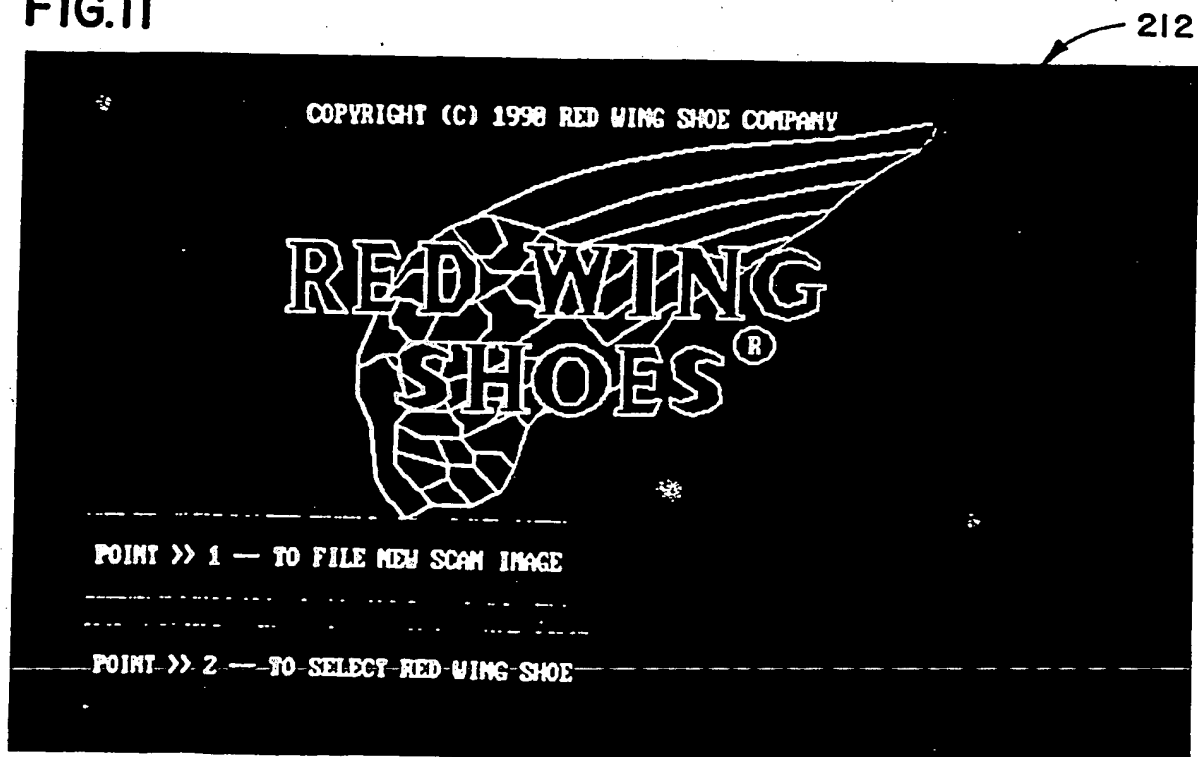

10 / 3 8

FIG.12

214

EXISTING CUSTOMERS IN FILES

JAY WHITE	10.5	12	10-22-1934	M	1
JAY WHITE	11	13	11-07-1939	M	3
JAY WHITE 11-25-89	10.5	12	11-25-1939	M	2
CHARLIE WEAVER	11	11.5	04-04-1938	M	3
JAY WHITE 11-15	10.5	12	11-15-1939	M	2

POINT TO THE CUSTOMER NUMBER YOU WANT TO SAVE UNDER
RETURN TO THE SELECTION MENU

FIG.13

216

JAY WHITE
1620 SW OVERTURF
BEND OR 97702
583 389-8844
35

CUSTOMER FILE NUMBER : FAST ACCESS NUMBER

1	2	3	4	5	6	7	8	9	0	-	<div>BACKSPACE</div> <div>ENTER</div> <div>RETURN</div>
Q	W	E	R	T	Y	U	I	O	P		
A	S	D	F	G	H	J	K	L	:		
Z	X	C	V	B	N	M	,	.			
SPACE BAR											SPACE BAR

FIG.14

218

FEMALE

MALE

INDICATE THE APPROPRIATE SEX

FIG.15

220

FIRM - TIGHT

MEDIUM - NORMAL

LIGHT - LOOSE

INDICATE YOUR FIT PRESSURE PREFERENCE

FIG. 20


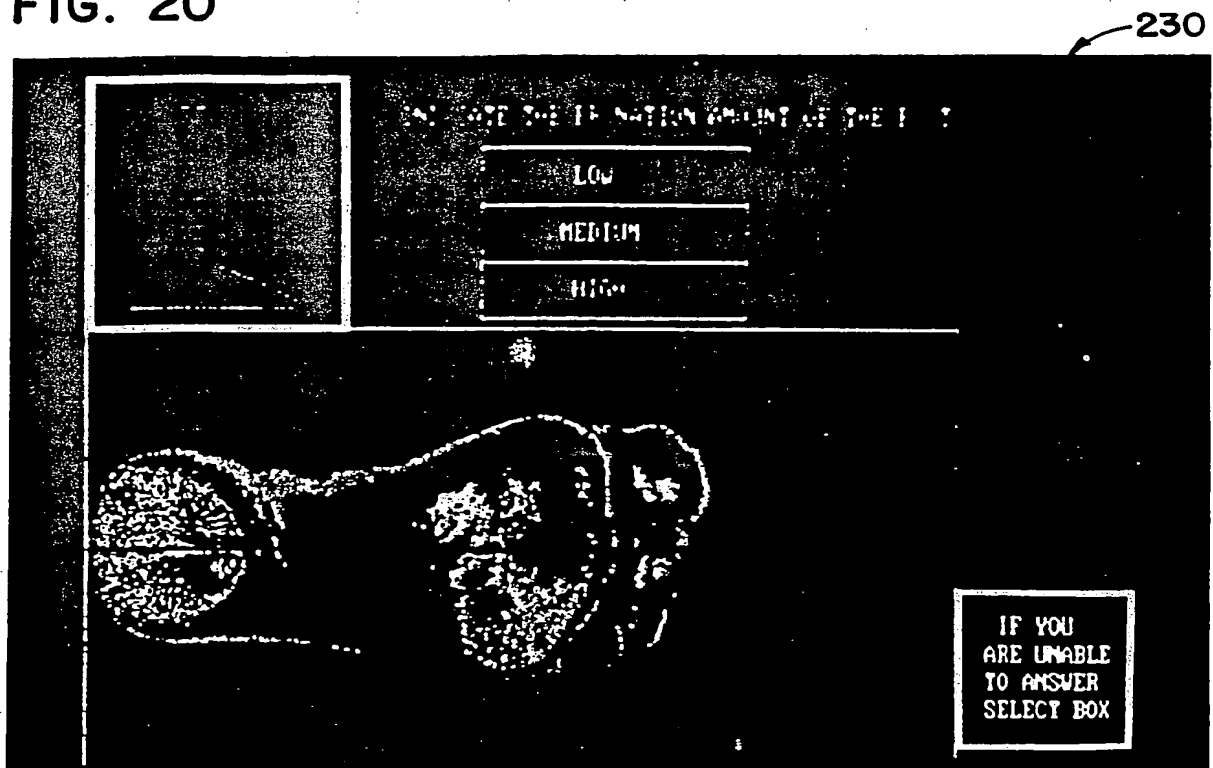


FIG. 21

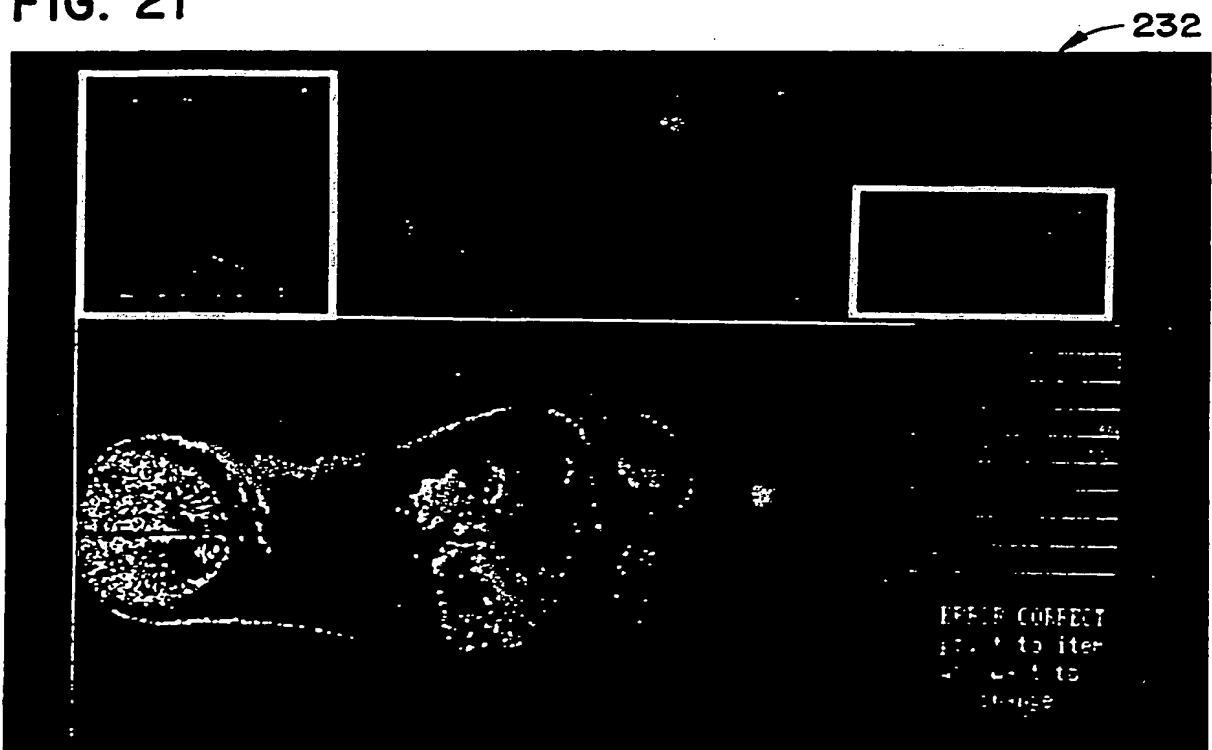

15 / 3 8

FIG. 22

234

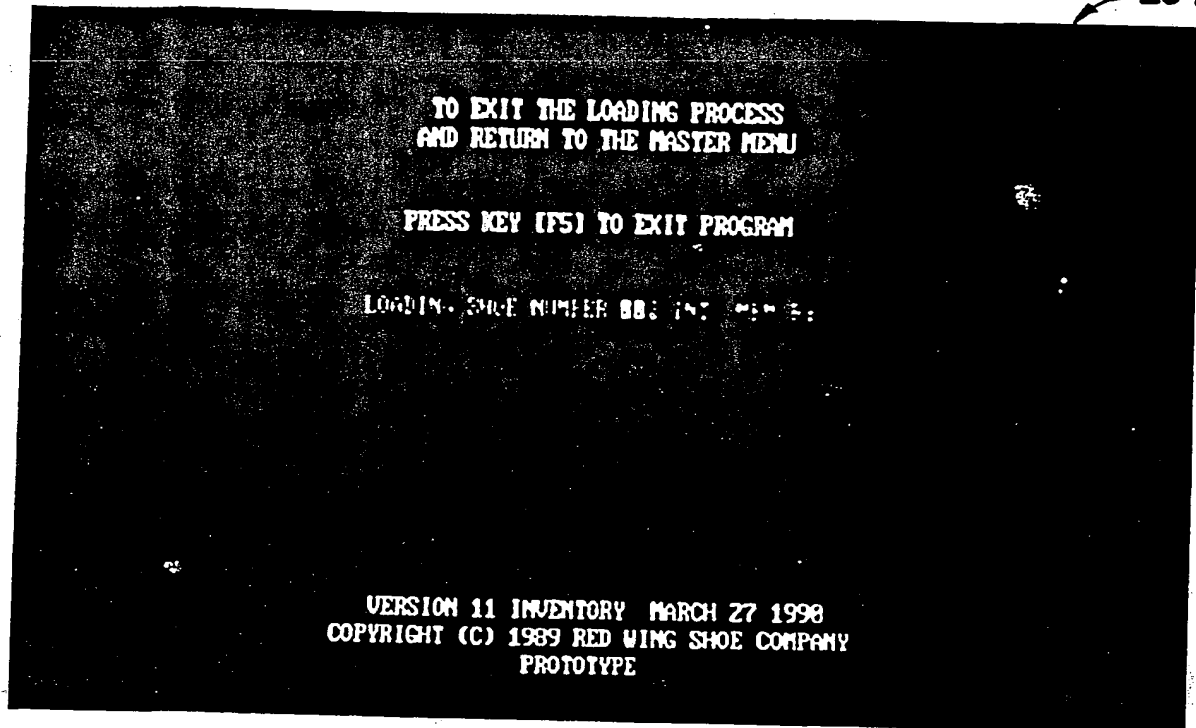


FIG. 23

236

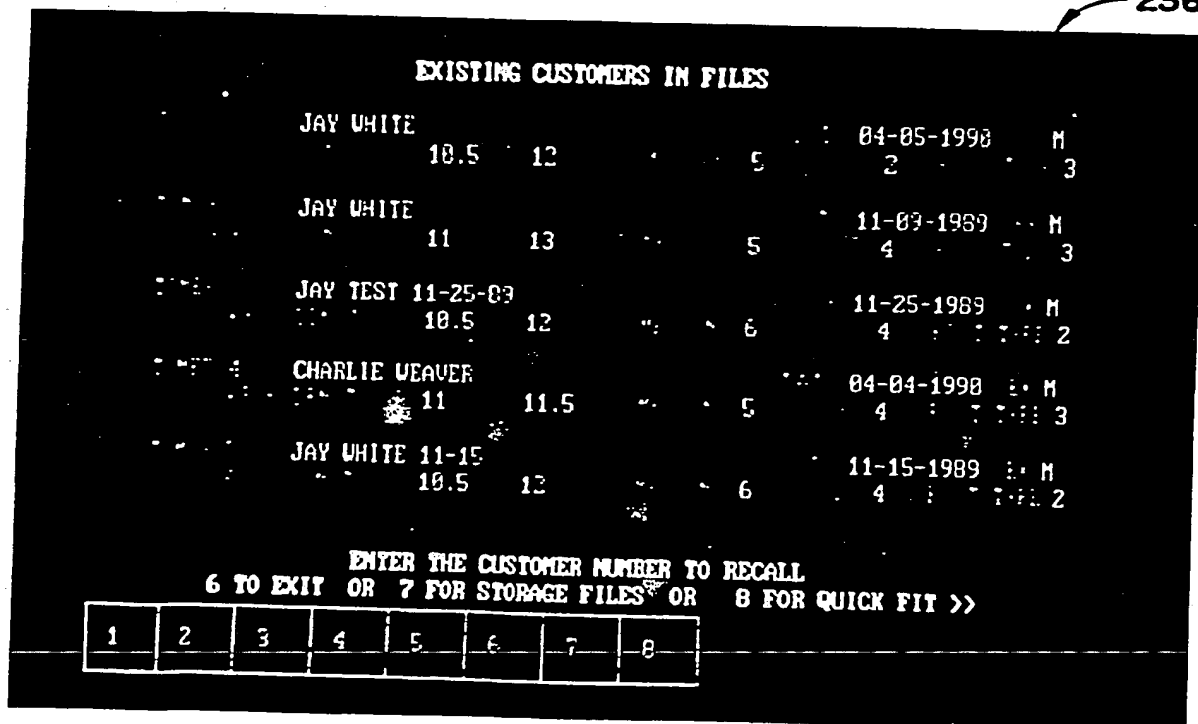


FIG. 16

222

Light weight - THIN
Medium weight - NORMAL
Heavy weight - THICK
Multiple pairs - VERY THICK

INDICATE YOUR PREFERENCE IN SOCK THICKNESS

FIG. 17

224

WORK BOOT AND SHOES
SPORT BOOTS AND SHOES
SAFETY WORK BOOT AND SHOES
CASUAL BOOTS AND SHOES
INSULATED WATERPROOF
WESTERN BOOTS

INDICATE THE SHOE CATEGORY TO SELECT FROM

13 / 3 8

FIG. 18

226

INDICATE YOUR OCCUPATION

- TRANSPORTATION
- CONSTRUCTION
- BUILDING TRADE
- AGRICULTURE
- HUNTING - OUTDOOR - SPORT
- HEAVY MANUFACTURING
- LIGHT MANUFACTURING
- HIGH TECH - ELECTRICAL
- SERVICE - UNIFORM
- LEISURE - CASUAL

FIG. 19

228

INDICATE THE ENVIRONMENTAL
CONDITION THE SHOE WOULD
BE WORN MOST FREQUENTLY

- OIL
- TRACTION - WET
- CHEMICALS
- CONCRETE
- METAL CHIPS
- STATIC-ESD
- HEAT RESISTANT
- NON-MARKING
- ABRASION
- NONE OF THE ABOVE

16 / 3 8

FIG.24

238

QUICK FIT DATE 84-85-1998

TOE LENGTH R>18 L>11 WIDTH ZONE R> 2 L> 1
ARCH LENGTH R>18.5 L>12 HEEL ZONE 4 CURVE ZONE 2 FOOT TYPE 3

1 FEMALE 2 MALE 3 RETURN TO SELECTION MENU

1	2	3
---	---	---

FIG.25

240

JAY WHITE

PRESS NUMBER TO INITIATE SEARCH

1. RUN FOOTWEAR SELECTION
2. Select another person

SELECT

1	2
---	---

FIG.26

242


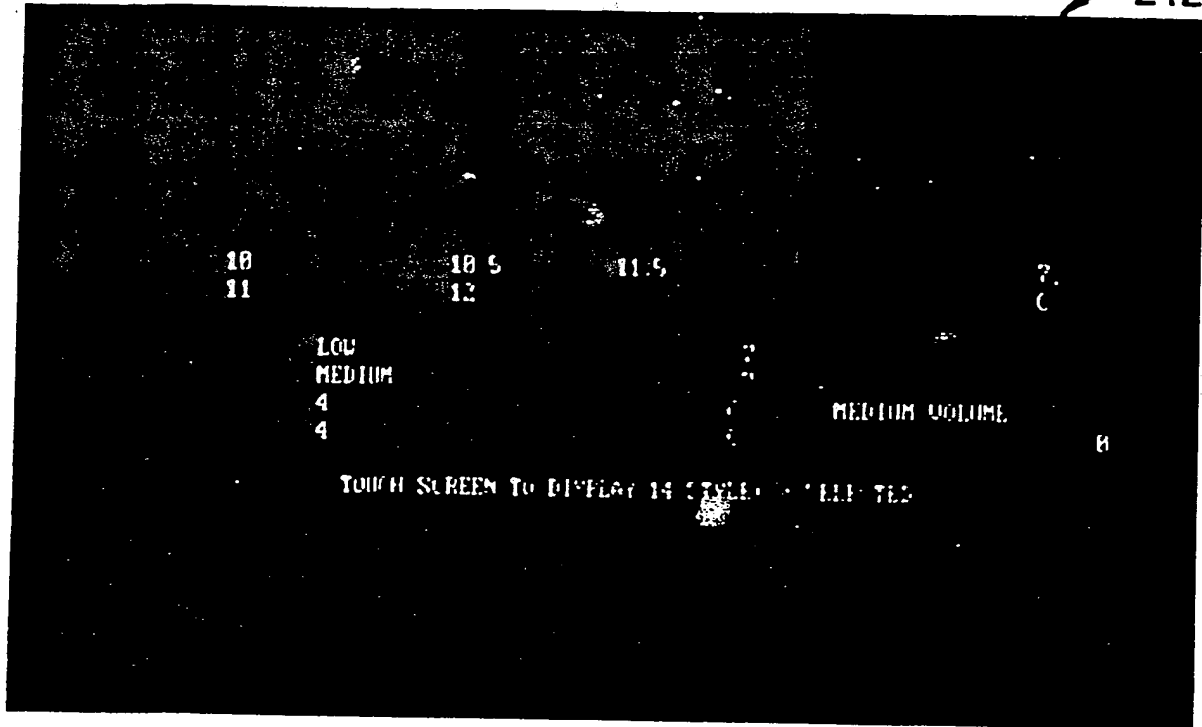


FIG.26A

241

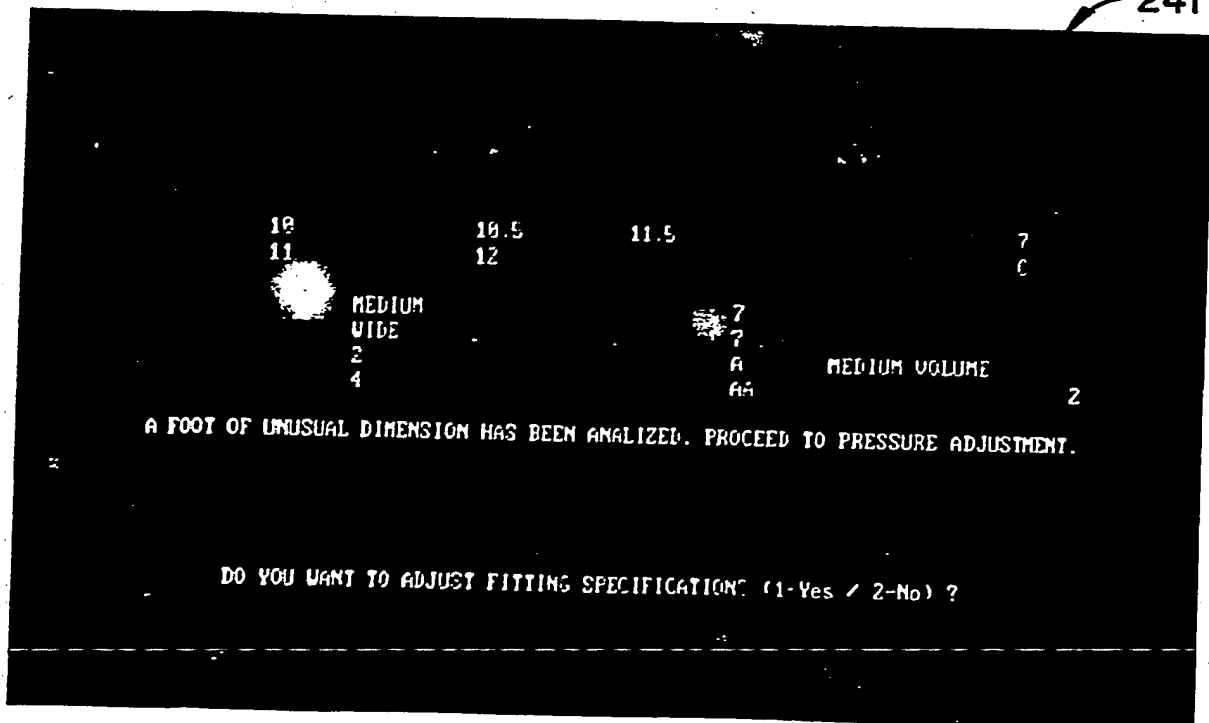

18 / 3 8

FIG.27

243

TOUCH SCREEN TO DISPLAY 14 STYLE(S) SELECTED				
1	DUNOON OXFORD	9217	11.5 C	11.5 C
2	DUNOON OXFORD	9287	11.5 C	11.5 C
3	RED WING SERVICE SHOE	8184	11.5 C	11.5 C
4	RED WING SERVICE SHOE	8186	11.5 C	11.5 C
5	RED WING SERVICE SHOE	8181	11.5 C	RED WING SERVICE SHOE 8181 11.5 C
6	RED WING WORK SHOE	9335	11.5 C	11.5 C
7	SERVICE OXFORD	8595	11.5 C	11.5 C
TOUCH SCREEN TO DISPLAY REMAINING MODELS				

FIG.28

244

9	IRISH SETTER PULL ON	8866	11.5 C	11.5 C
10	IRISH SETTER BOOT M	8877	11.5 C	IRISH SETTER BOOT M 8877 11.5 C
11	IRISH SETTER BOOT	8875	11.5 C	11.5 C
12	RED WING WORK SHOE	8952	12 C	12 C
13	PECOS PULL ON BOOT	1184	11.5 C	11.5 C
14	IRISH SETTER PULL ON	8866	11.5 C	11.5 C
TOUCH SCREEN TO DISPLAY REMAINING MODELS				
DO YOU WANT TO ADJUST FITTING SPECIFICATIONS (1-Yes / 2-No) ?				
1	2			

FIG.29

245

9	IRISH SETTER PULL ON 0866	11.5 C	11.5 C
10	IRISH SETTER BOOT M 0877	11.5 C	IRISH SETTER BOOT M 0877 11.5 C
11	IRISH SETTER BOOT 0875	11.5 C	11.5 C
12	RED WING WORK SHOE 0952	12 C	12 C
13	PECOS PULL ON BOOT 1104	11.5 C	11.5 C
14	IRISH SETTER PULL ON 0866	11.5 C	11.5 C

TOUCH SCREEN TO DISPLAY REMAINING MODELS
 [1] TO MENU [2] COMPLETE HARDCOPY [3] SHOES LISTED ONLY [4] NO INVENTORY CHECK

1	2	3	4
---	---	---	---

FIG.30

246

ENTER THE NUMBER OF THE CATEGORY YOU WANT TO ADJUST

249 >>>

>>>

>>>

>>>

>>>

>>>

POINT TO CATEGORY [##] -GO- TO CONTINUE >>>

THE >>> SIGN INDICATES THE CATEGORIES THAT MAY REQUIRE ADJUSTMENT TO ALLOW MORE PRECISE FITTING OF YOUR FOOT

1	2	3	4	5	6	7	8	9	10	11	12	GO
---	---	---	---	---	---	---	---	---	----	----	----	----

20 / 3 8

FIG. 31

247

ENTER THE NUMBER OF THE CATEGORY YOU WANT TO ADJUST

249

[1] SOCK THICKNESS >>> [4] HEEL WIDTH
 [2] FIT PRESSURE >>> [5] FOOT TYPE
 >>> [3] FOOTWEAR CATEGORY >>> [6] SHOE LAST CODE
 >>> [7] ENVIRONMENTAL EFFECTS >>> [8] INFORMATION
 [11] FOOT SIZE >>> [12] VOLUME

YOUR HEEL WIDTH ZONE IS >> 4
 CHANGE TO [1]Ex-Nar [2]Nar [3]Med [4]Wide [5]Ex-Wide >>

1	2	3	4	5
---	---	---	---	---

FIG. 32

248

ENTER THE NUMBER OF THE CATEGORY YOU WANT TO SELECT

[1] SELECT SHOE FOR NEXT PERSON [2] MAKE DATA CHANGES
 [3] FIT-SCAN CONTROL PROGRAM [4] RED WING PRODUCT CATALOG
 [5] LAST OVERLAY VIEWING [6] FIT AID RECOMMENDATIONS

CATEGORY SELECTION [8] >>

1	2	3	4	5	6
---	---	---	---	---	---

FIG. 33

250

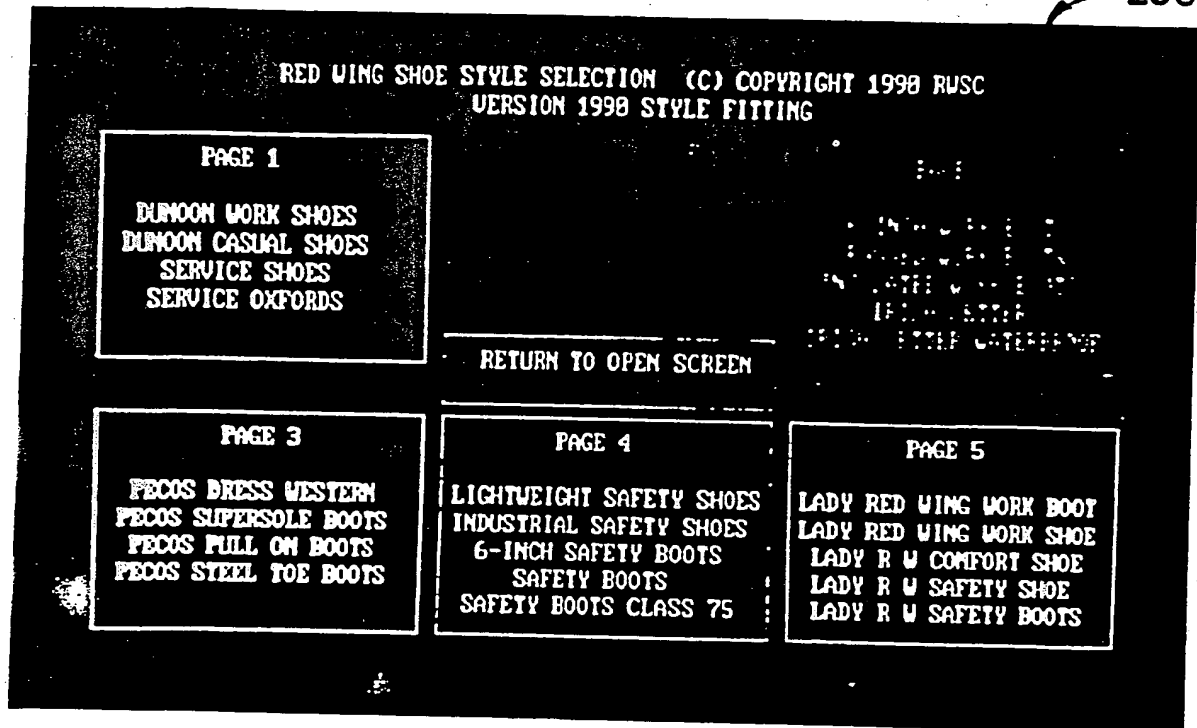


FIG. 34

252

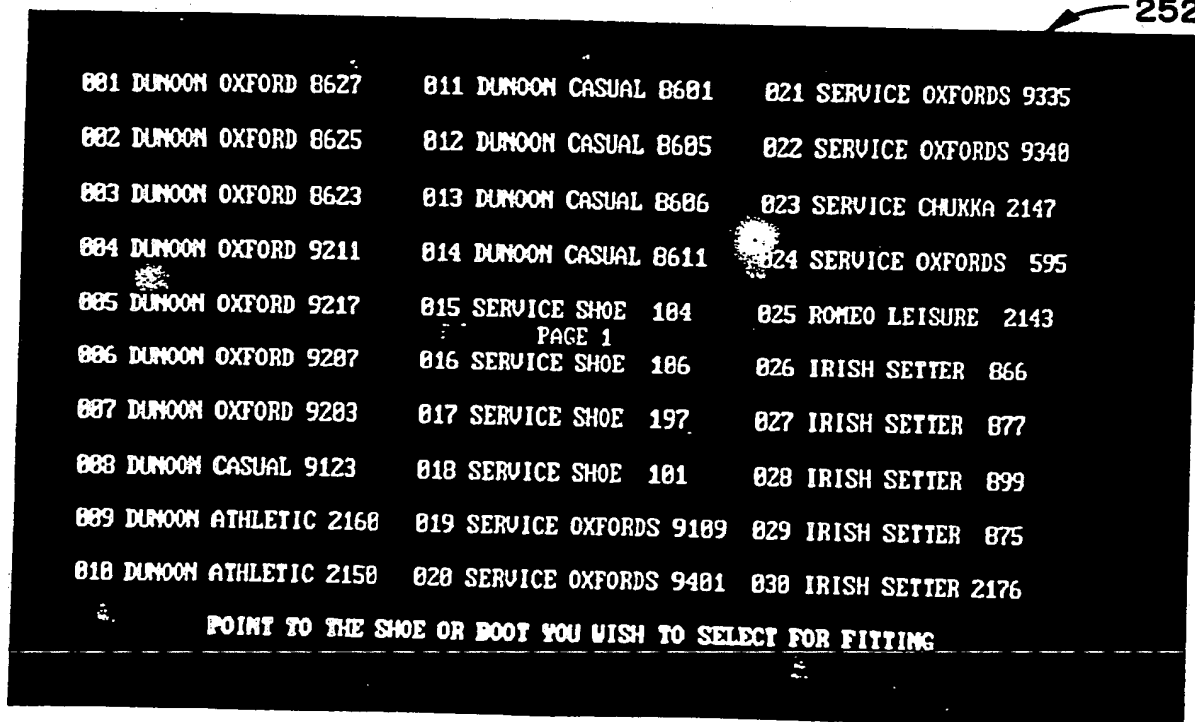


FIG. 35

254

COMFORT SLIPON ESD SHOE
STYLE B686 **DA T N MEET 192**
SIZE M **3-4**
6-16
7-13
10-14

FEATURES
INSULATION
SHANK POLISH
OUTER BLACK COMHIDE
COUNTER WATERPROOFED SHAPED REINFORCER
CONSTRUCTION CEMENT WEDGE
OUTER SOLE SOFTIE URETHANE ESD WEDGE NON SLIP SOLE AND HEEL
SPECIAL FEATURES LEATHER PADDED COLLAR

PAGE 1 **PAGE 2** **PAGE 3** **PAGE 4** **PAGE 5** **FIT THIS STYLE**

FIG. 36

256

QUICK FIT DATE 84-85-1998

TOE LENGTH R>18 L>11 WIDTH ZONE R> 2 L> 1
ARCH LENGTH R>18.5 L>12 HEEL ZONE 4 CURVE ZONE 2 FOOT TYPE 3

1 FEMALE 2 MALE 3 RETURN TO SELECTION MENU

1	2	3
---	---	---

FIG. 37


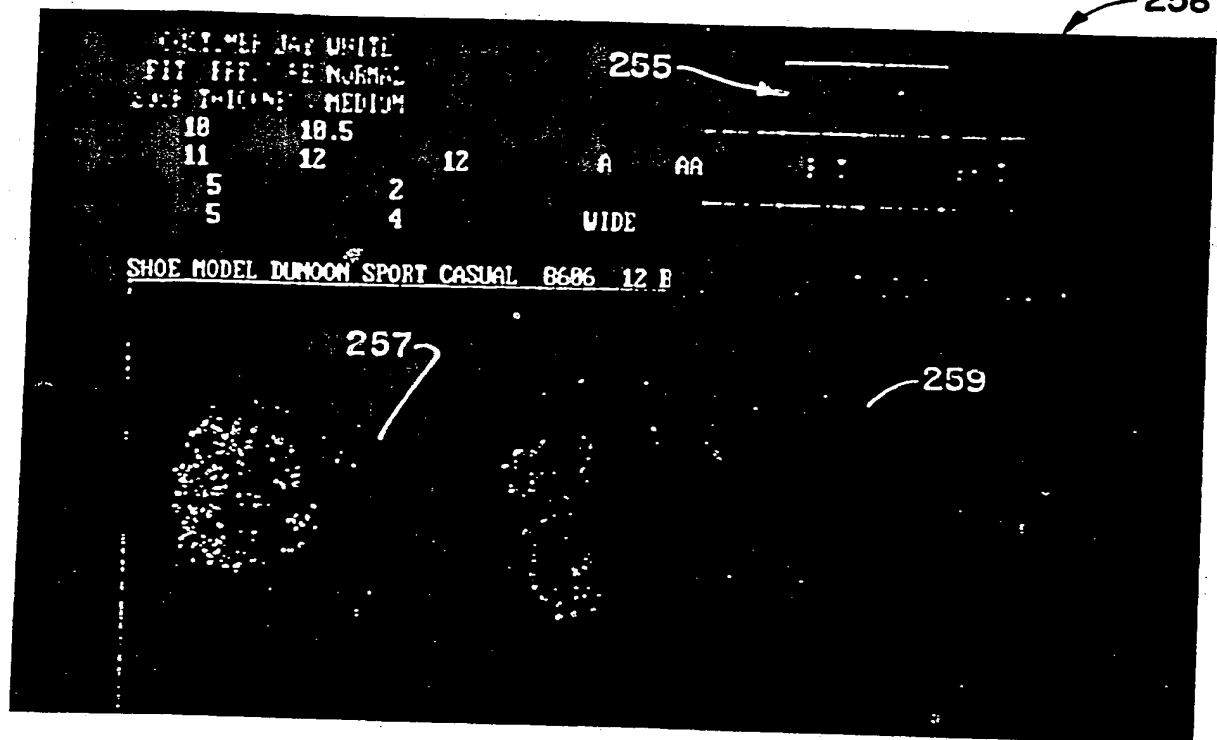


FIG. 38

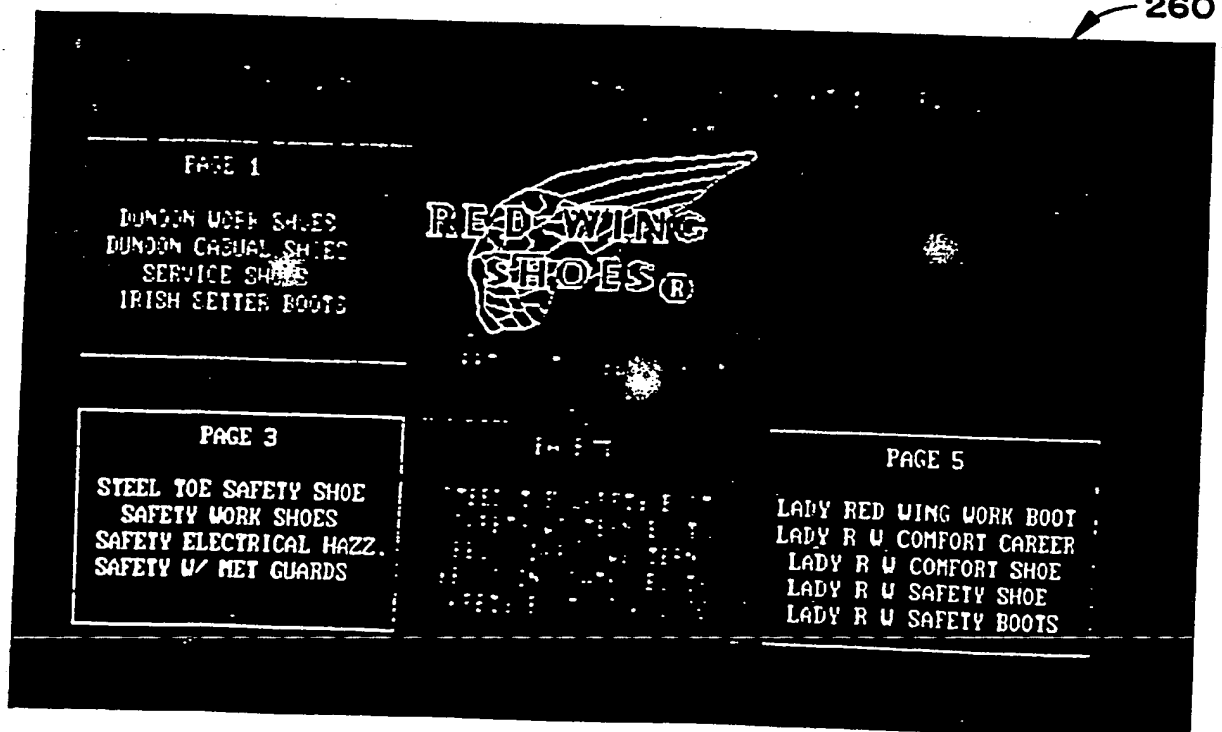

20 / 3 8

FIG. 31

247

ENTER THE NUMBER OF THE CATEGORY YOU WANT TO ADJUST

ENTER	249	ENTER
(001) SOCK THICKNESS	>>>(041) HEEL WIDTH	
(002) FIT PRESSURE	>>>(042) FOOT TYPE	
>>>(003) FOOTWEAR CATEGORY	>>>(043) SHOE LAST CODE	
>>>(004) ENVIRONMENTAL DATA	>>>(044) INFORMATION	
(111) FOOT SIZE	>>>(112) SHOE	

YOUR HEEL WIDTH ZONE IS >> 4
CHANGE TO (1)Ex-Nar (2)Nar (3)Med (4)Wide (5)Ex-Wide >>

1	2	3	4	5
---	---	---	---	---

FIG. 32

248

ENTER THE NUMBER OF THE CATEGORY YOU WANT TO SELECT

(11) SELECT SHOE FOR NEXT PERSON	(21) MAKE DATA CHANGES
(31) FIT- SCAN CONTROL PROGRAM	(41) RED WING PRODUCT CATALOG
(51) LAST OVERLAY VIEWING	(61) FIT AID RECOMMENDATIONS

CATEGORY SELECTION (1) >>

1	2	3	4	5	6
---	---	---	---	---	---

FIG. 33

250

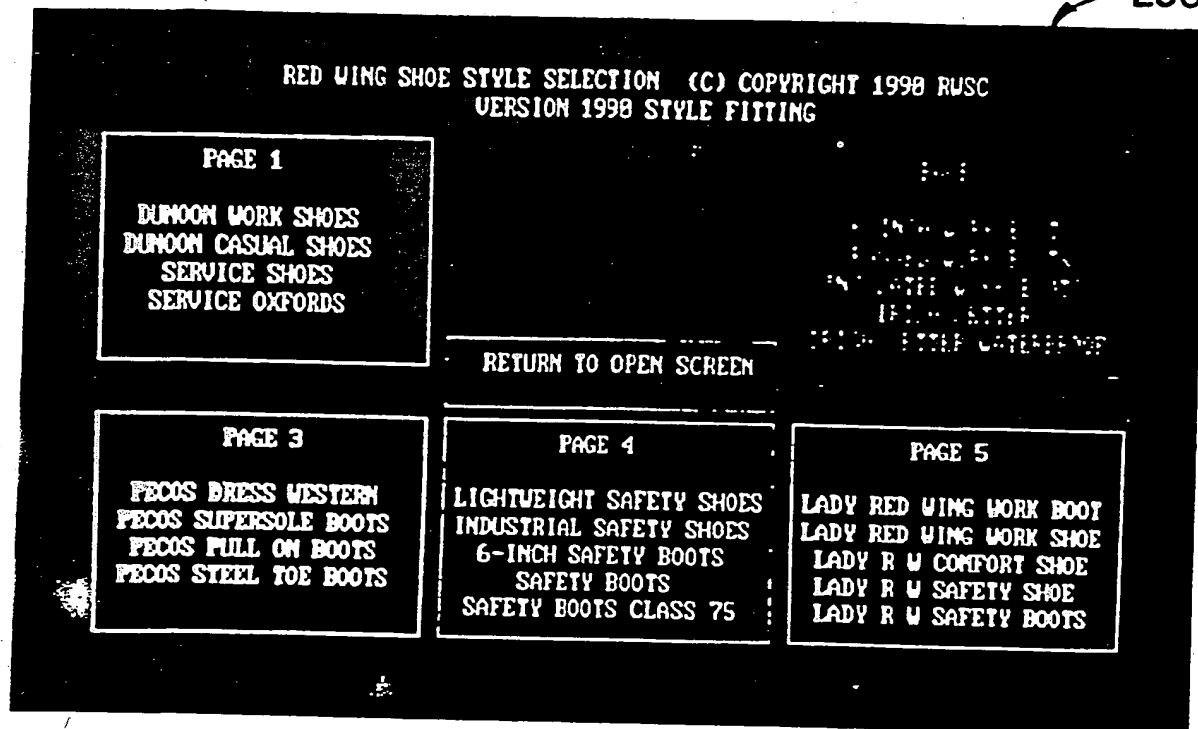


FIG. 34

252

001 DUNLOM OXFORD 8627	011 DUNLOM CASUAL 8601	021 SERVICE OXFORDS 9335
002 DUNLOM OXFORD 8625	012 DUNLOM CASUAL 8605	022 SERVICE OXFORDS 9340
003 DUNLOM OXFORD 8623	013 DUNLOM CASUAL 8606	023 SERVICE CHUKKA 2147
004 DUNLOM OXFORD 9211	014 DUNLOM CASUAL 8611	024 SERVICE OXFORDS 595
005 DUNLOM OXFORD 9217	015 SERVICE SHOE 104	025 ROMEO LEISURE 2143
006 DUNLOM OXFORD 9207	PAGE 1 016 SERVICE SHOE 106	026 IRISH SETTER 866
007 DUNLOM OXFORD 9203	017 SERVICE SHOE 197	027 IRISH SETTER 877
008 DUNLOM CASUAL 9123	018 SERVICE SHOE 101	028 IRISH SETTER 899
009 DUNLOM ATHLETIC 2160	019 SERVICE OXFORDS 9109	029 IRISH SETTER 875
010 DUNLOM ATHLETIC 2150	020 SERVICE OXFORDS 9401	030 IRISH SETTER 2176

POINT TO THE SHOE OR BOOT YOU WISH TO SELECT FOR FITTING

22 / 3 8

FIG. 35

254

COMFORT SLIPON ESD SHOE

STYLE 8686 LAST NUMBER 192
 SIZE M HEEL TO TOE 3-4
 FOOT TYPE 1 (NORMAL)
 G. COOL M. HEEL 100% M. TEE 6 7 8 9
 TEE 10 11 12 13 14 15 16 17 18 19 20

6-16
 7-13
 18-14

FEATURES

LINER CAMBRELLE
 INSOLE CUSHION LEATHER COVERED ESD
 SHANK
 OUTER BLACK COMHIDE
 COUNTER WATERPROOFED SHAPED REINFORCER
 CONSTRUCTION CEMENT WEDGE
 OUTER SOLE SOFTIE URETHANE ESD WEDGE NON SLIP SOLE AND HEEL
 SPECIAL FEATURES LEATHER PADDED COLLAR

PAGE 1 PAGE 2 PAGE 3 PAGE 4 PAGE 5 FIT THIS STYLE

FIG. 36

256

QUICK FIT DATE 84-85-1998

TOE LENGTH R>18 L>11 WIDTH ZONE R>2 L>1
 ARCH LENGTH R>18.5 L>12 HEEL ZONE 4 CURVE ZONE 2 FOOT TYPE 3

1 FEMALE 2 MALE 3 RETURN TO SELECTION MENU

1 2 3

FIG. 37


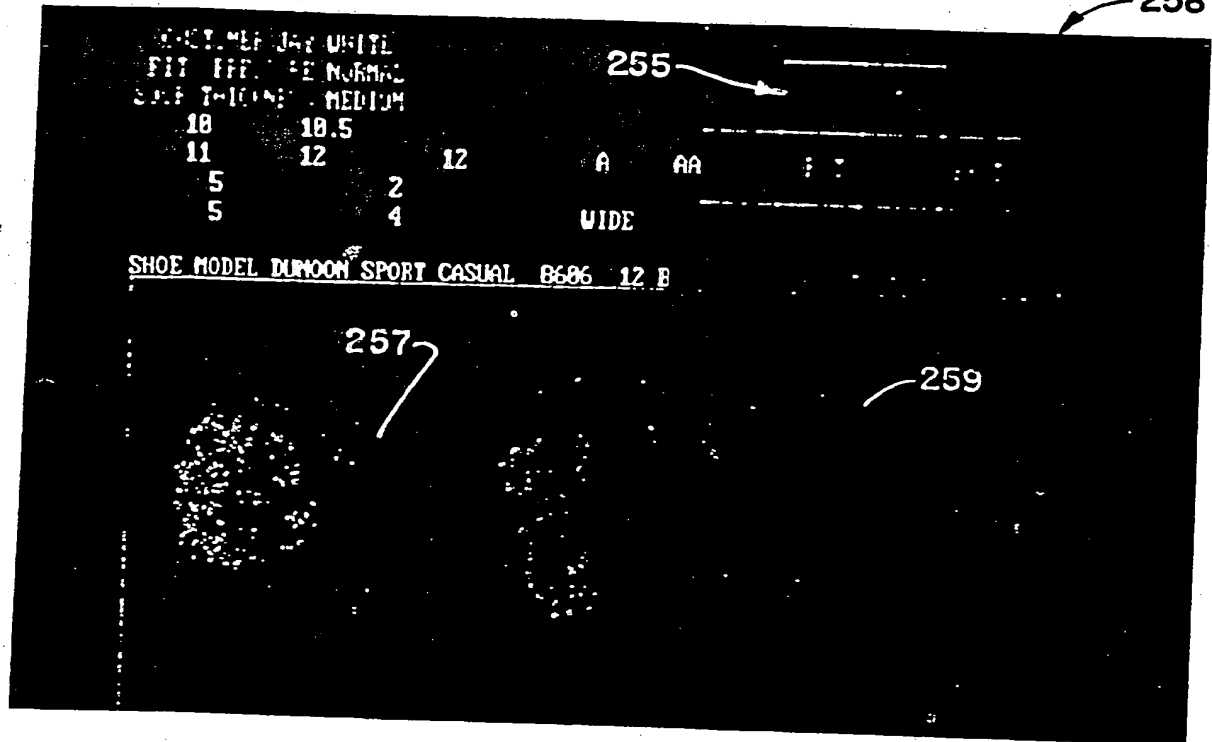


FIG. 38

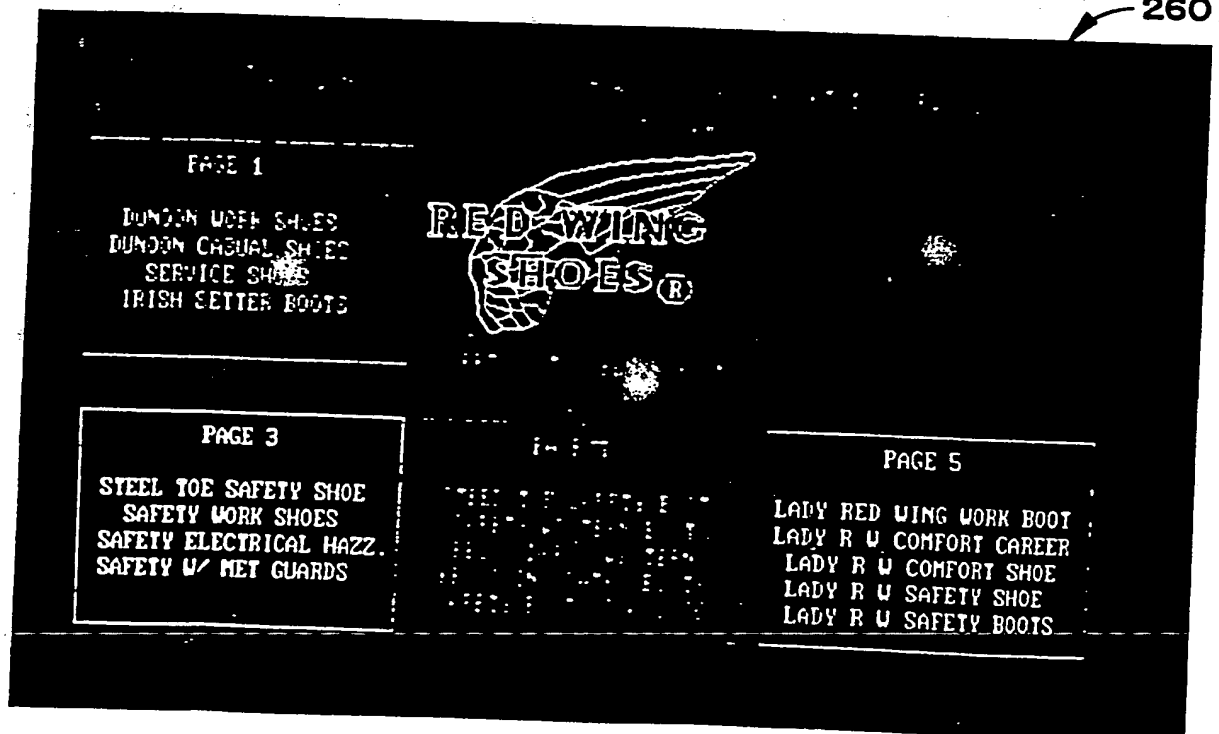

24 / 3 8

FIG.39

262


861 SAFETY CASUAL 6622	871 SAFETY OXFORD 2225	881 SAFETY BOOT 8" 2248
862 SAFETY ATHLETIC 6658	872 SAFETY OXFORD 2286	882 SAFETY BOOT 8" 2284
863 SAFETY SLIP ON 8783	873 SAFETY COMFORT 6684	883 SAFETY BOOT NET 4486
864 SAFETY MOCCASIN 6633	874 SAFETY BOOT 6" 2245	884 SAFETY BOOT NET 4428
865 SAFETY OXFORD 8781	875 SAFETY BOOT 6667	885 SAFETY BOOT NET 4488
866 SAFETY ATHLETIC 6655	876 SAFETY BOOT 6" 2243	886 SAFETY BOOT COLD 4481
867 SAFETY ATHLETIC 6656	877 SAFETY BOOT 6" 2224	887 SAFETY BOOT INS. 4414
868 SAFETY ATHLETIC 6652	878 SAFETY CHUKKA 6678	888 SAFETY BOOT HAZ 4429
869 SAFETY ATHLETIC 6653	879 SAFETY BOOT 8" 2233	889 SAFETY BOOT HAZ 4438
878 SAFETY COMFORT 6682	888 SAFETY BOOT 8" 2288	898 SAFETY BOOT INS. 4412


TO
PAGE 1TO
PAGE 3TO
PAGE 4TO
PAGE 5TO
MAIN SCREEN

FIG.40

264

TOUCH VIEW TO ZOOM

263 

263' 

263" 

IRISH SETTER SPORT BOOT
877
M

23
3-4

G G G

5-16
7-13
7-13

9-14
8-18
7.5-13

8-11

FEATURES
LEATHER LINED UAMP
SWEAT RESISTANT OAK LEATHER
SWEAT RESISTANT OAK LEATHER
RED WING OIL

8" FULL GRAIN OIL TANNED WATER REPELL ORO RUSSET

GOODYEAR LEATHER WELT SEWN HEEL SEAT/WHITE RUBBER MIDSOLE
CUSHION CREPE WEDGE W/TRACTION TRED
ROLLED TOP BAND/WRAP MUG/MISHMATED TO ORDER

PAGE 1 PAGE 3 PAGE 4 PAGE 5 MAIN SCREEN

25 / 3 8

FIG.41

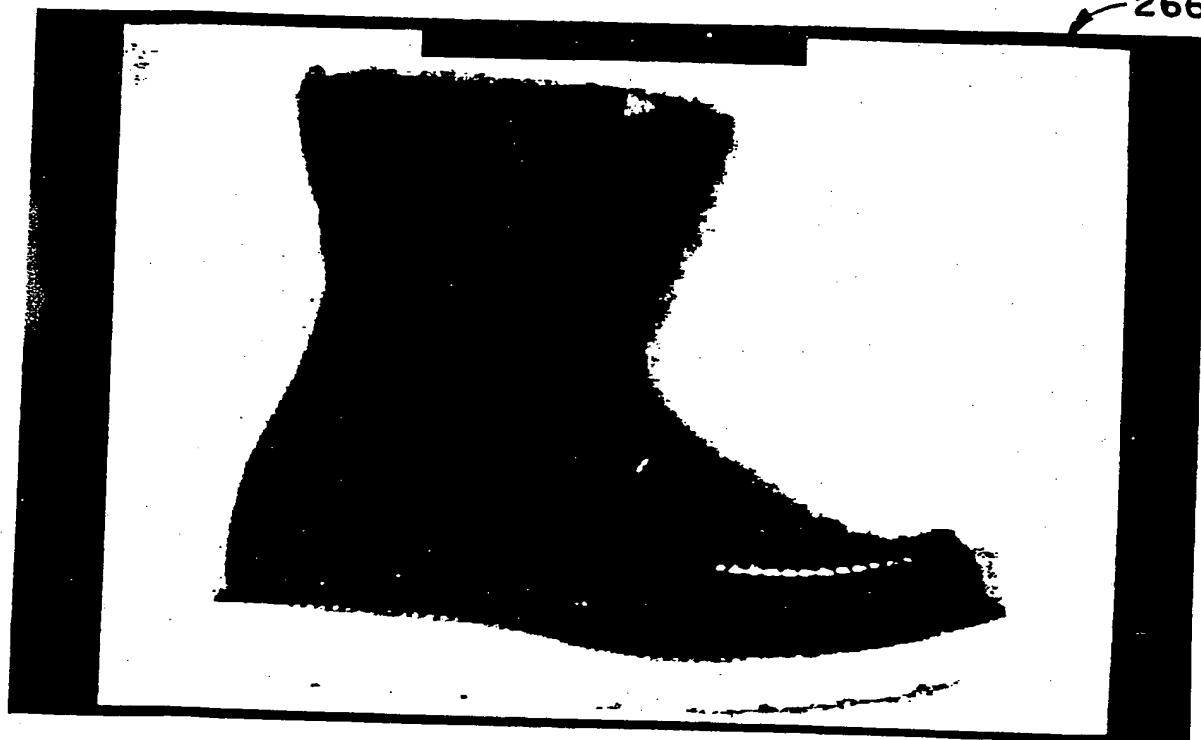


FIG.42



27 / 3 8

FIG.45

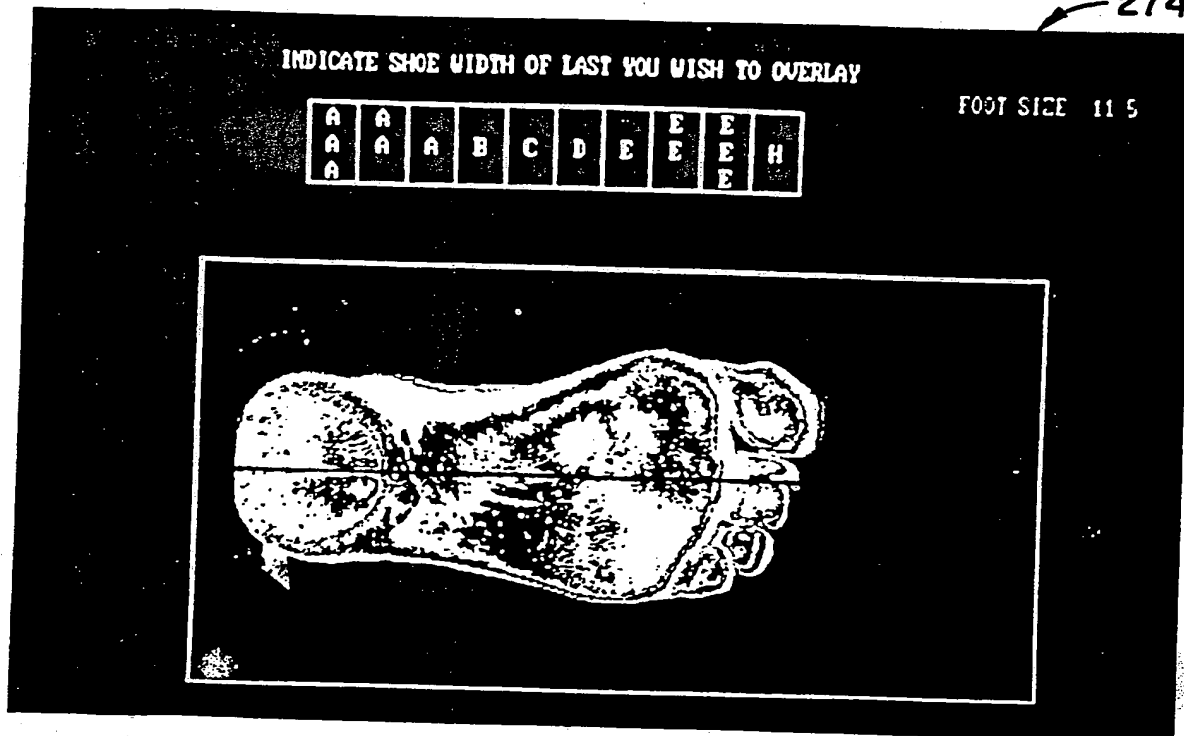


FIG.46

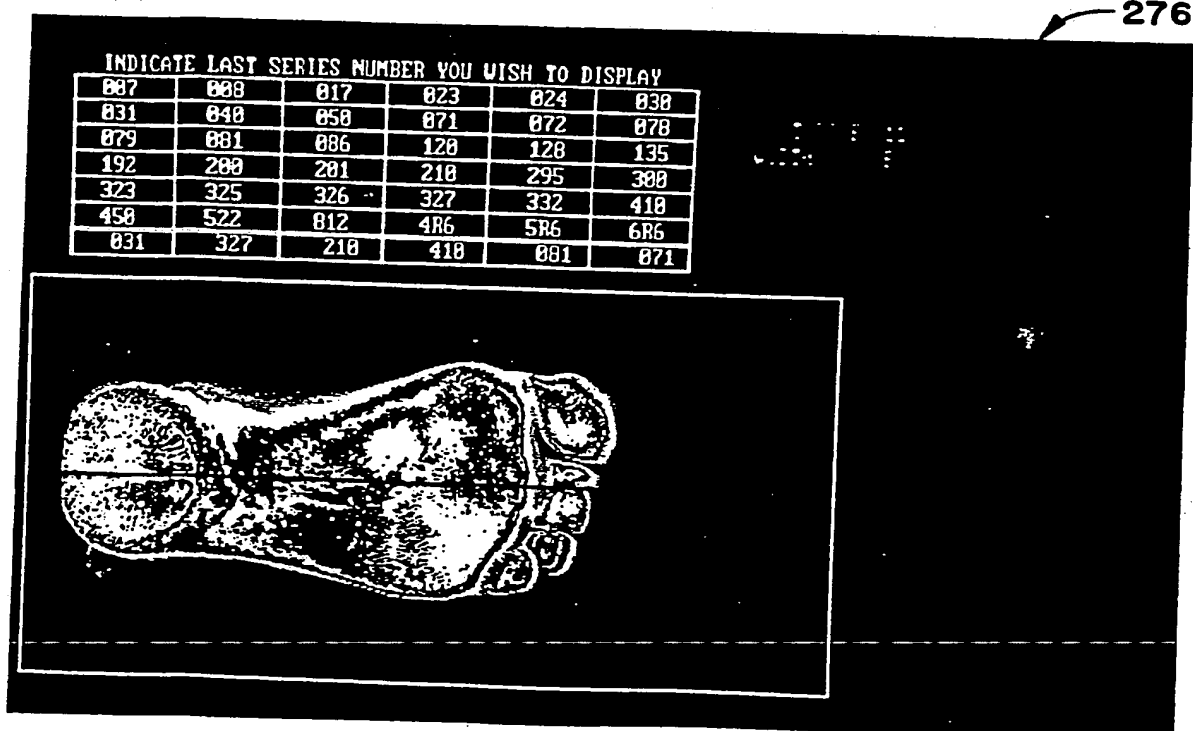


FIG. 47

278

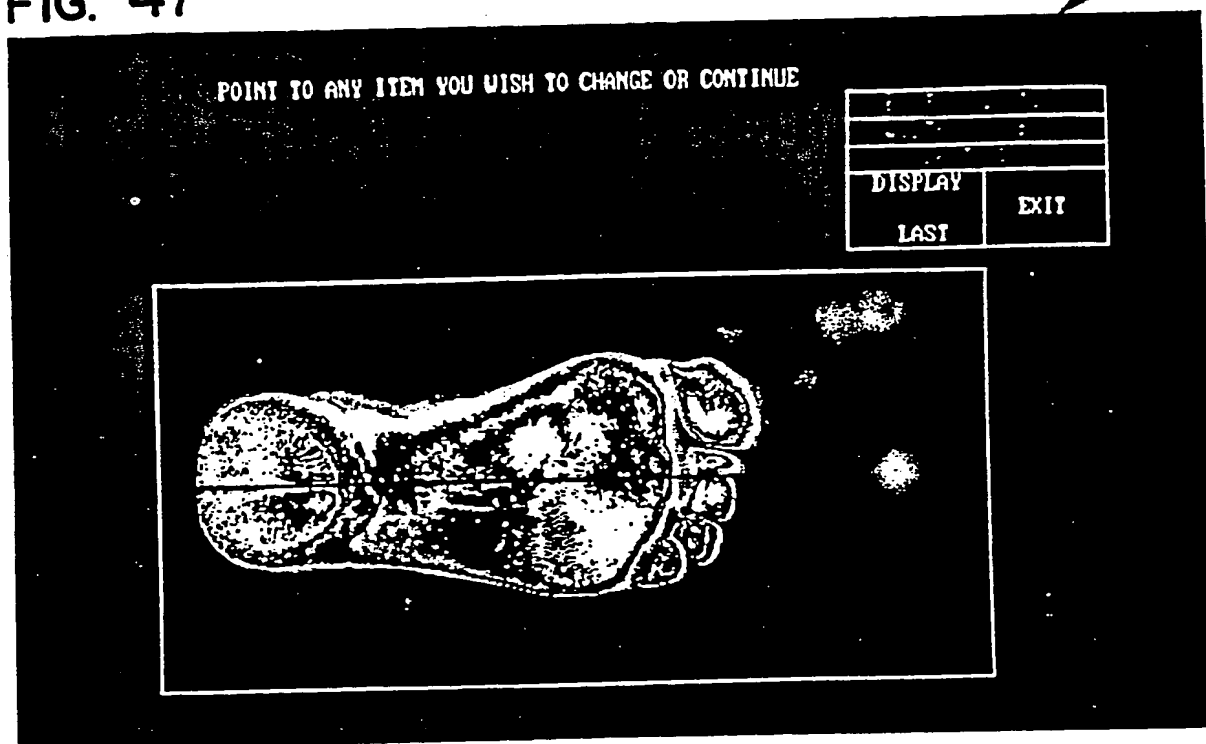


FIG. 48

280

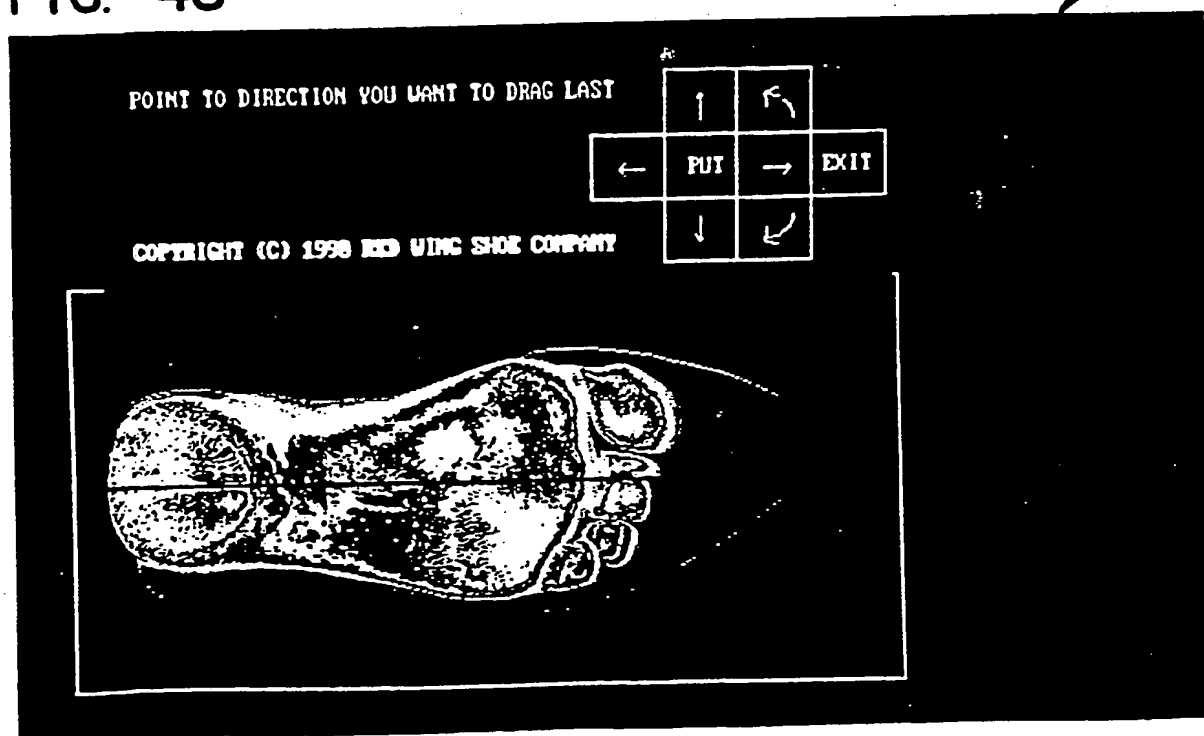


FIG.49

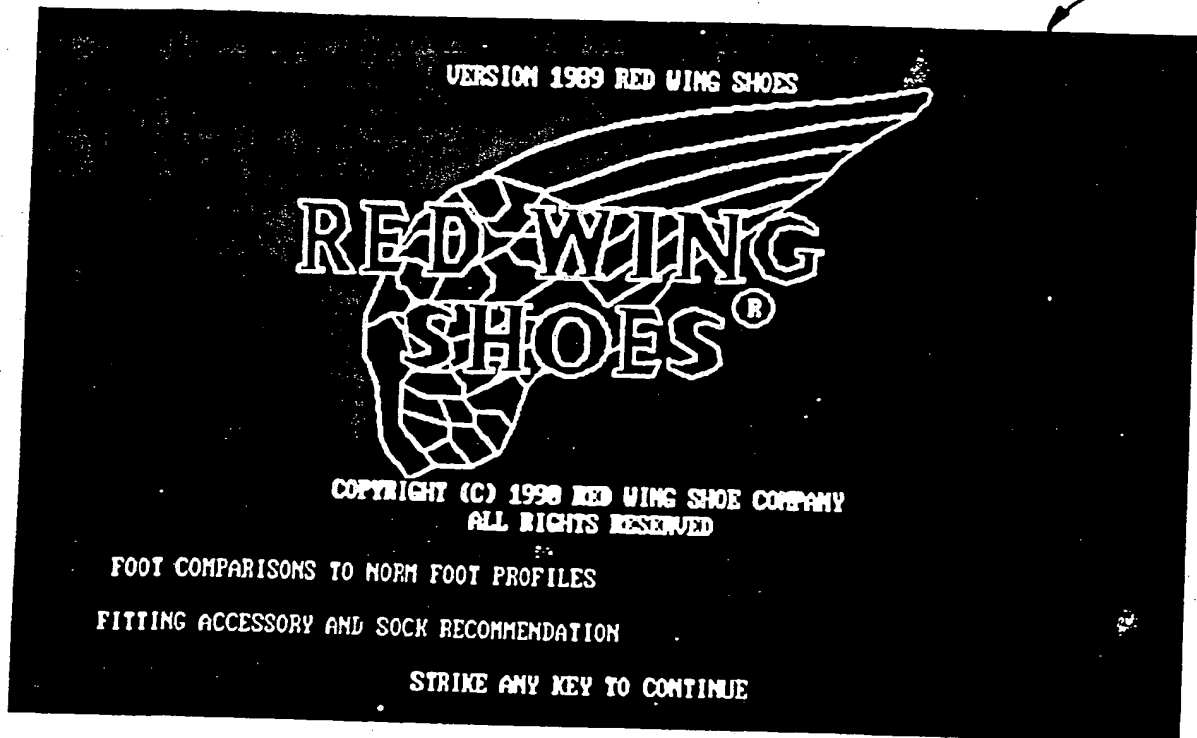


FIG.50

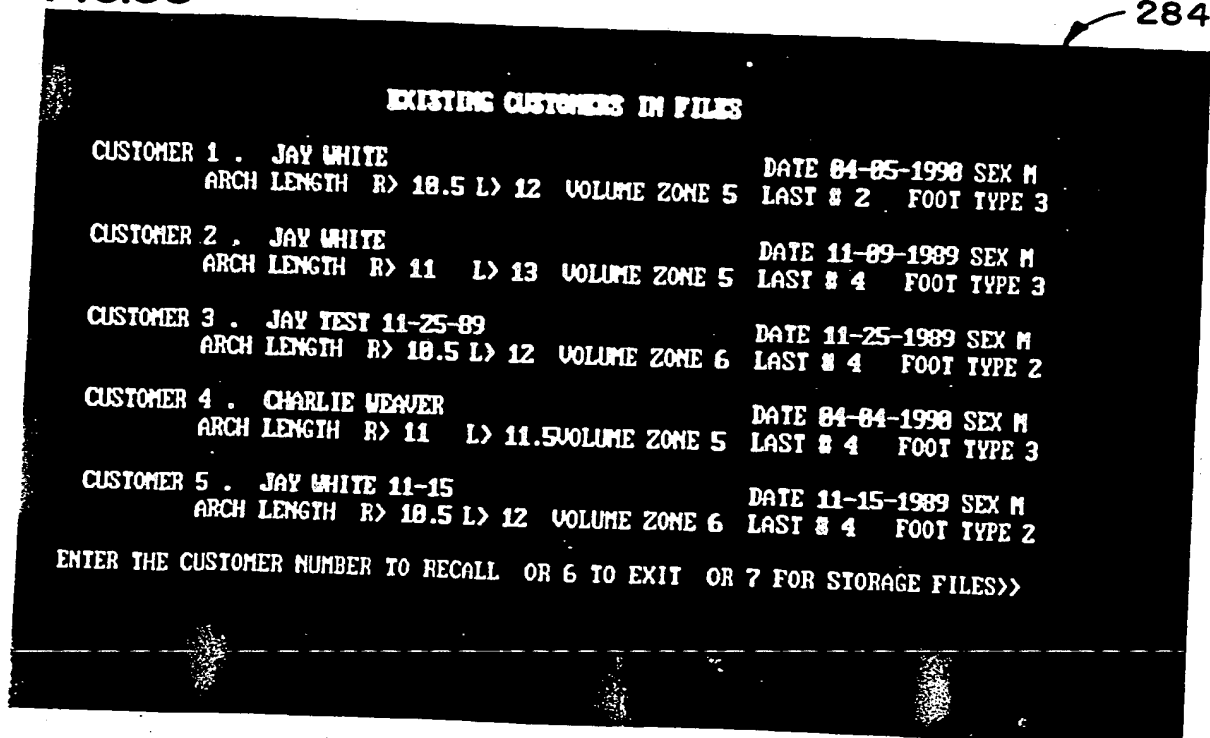


FIG. 51

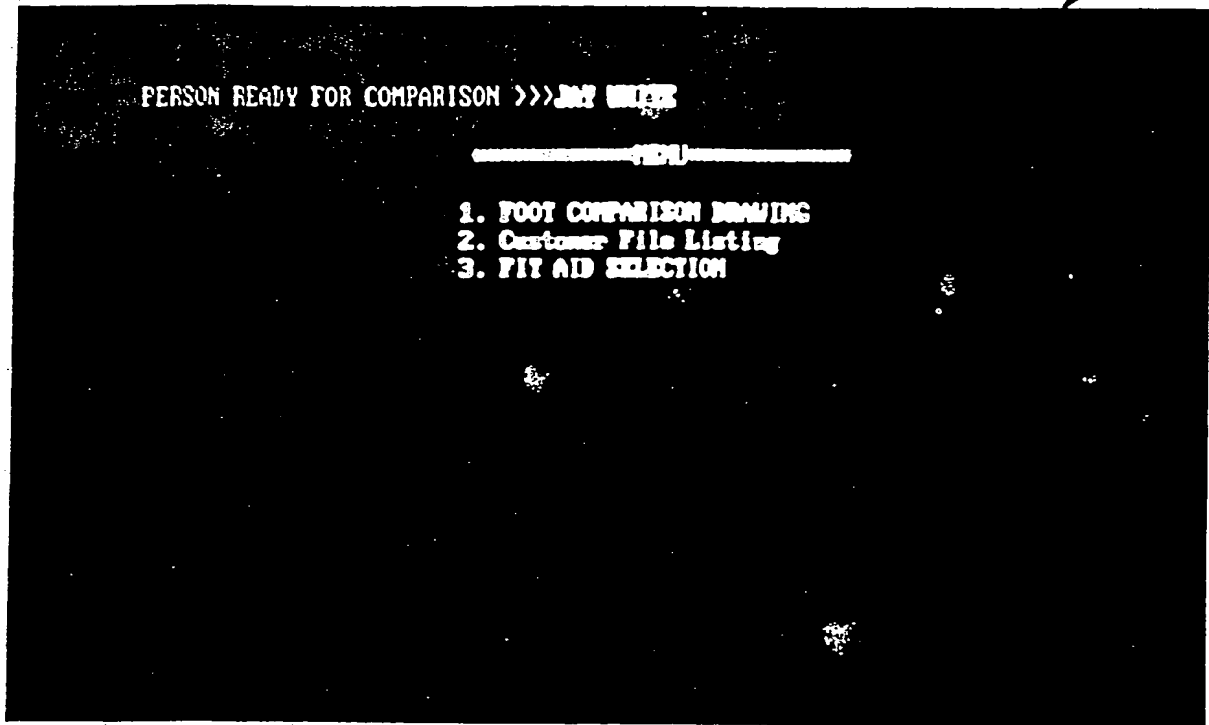


FIG. 52

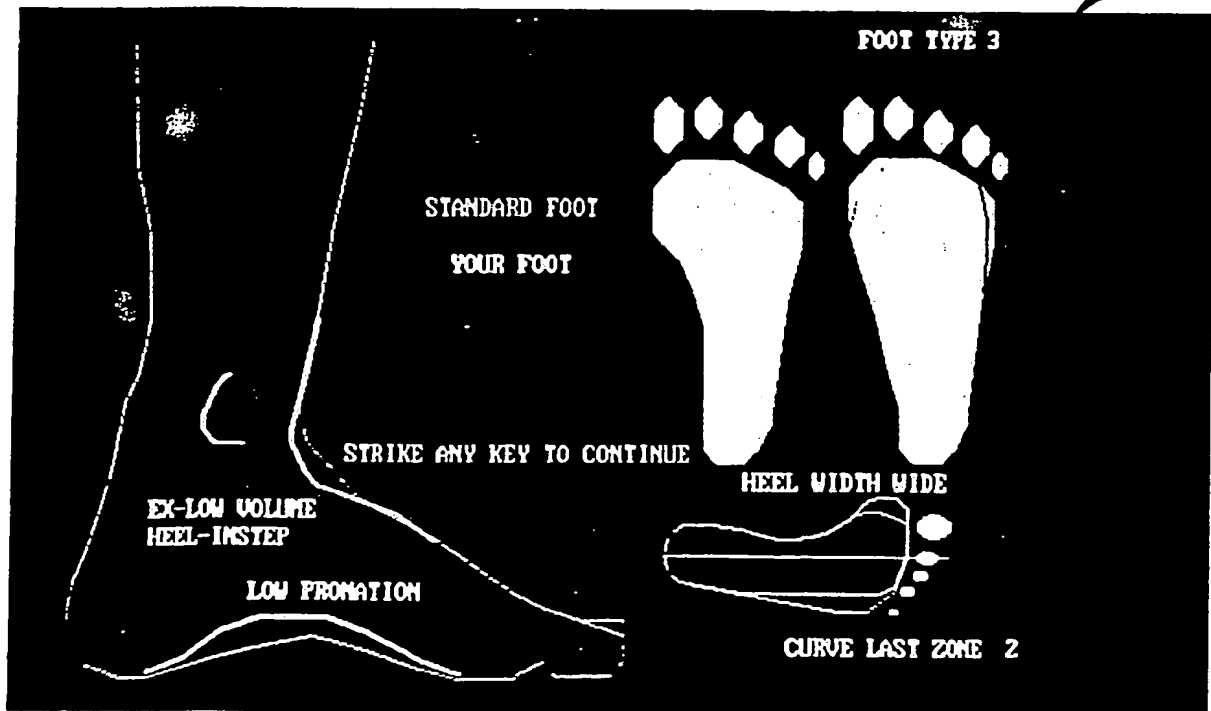


FIG. 53

290


JAY WHITE

*** INDICATES FIT AID
>>> INDICATES SHOE MODIFICATION

PROMOTION CONTROL	
*** Eagle insole	13.20
*** Impact insole	7.20
DIMENSIONAL MODIFICATIONS	
*** volume reduction shims	5.00
*** metatarsal pads	8.00
>>> lace pattern adjustment	8.00
>>> forefoot medial stretch	8.00
SOCK RECOMMENDATIONS	
*** Cotton Tube sock	4.00
*** Cotton Fitted Sock	4.00
*** All Around Sock	6.50
*** Wool Tube Sock	5.50
*** Eagle Polywick Sock	9.00
*** Duo-Therm Sock	7.25
*** Wick Duxoon Orion	5.00

STRIKE ANY KEY TO DISPLAY REMAINING PRODUCTS

FIG. 54

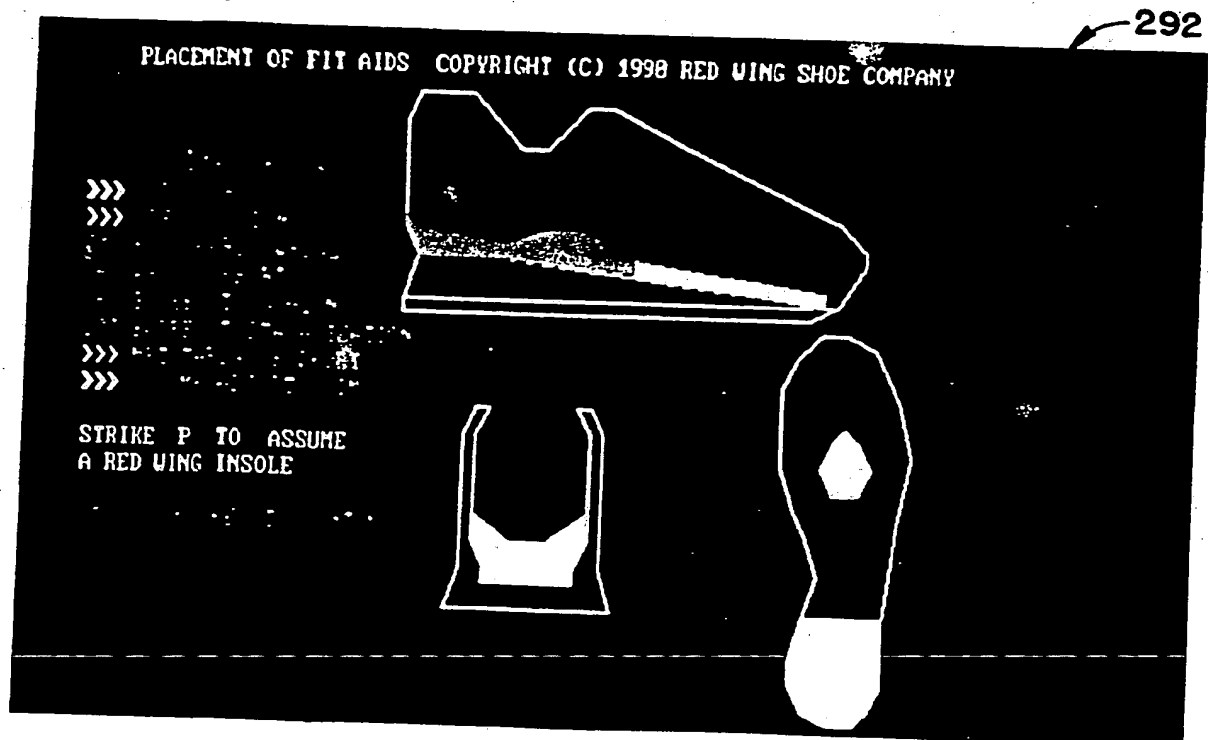

3 2 / 3 8

FIG. 55

294

ENTER THE NUMBER OF THE CATEGORY YOU WANT TO BRANCH TO

[1] FIT AIDS FOR NEXT PERSON	[2] MAKE DATA CHANGES
[3] RED WING SHOE SELECTION	[4] RED WING CATALOG
[5] FIT AID SELECTION	

CATEGORY SELECTION [1]

FIG. 56

295

ENTER THE NUMBER OF THE CATEGORY YOU WANT TO ADJUST

[1] [2]	>>>[101] FOREFOOT WIDTH
[3] [4] [5] [6] [7] [8] [9] [10]	>>>[104] HEEL WIDTH
[105] FIT BELIEF	>>>[106] FOOT TYPE
>>>[107] BUILD-BASE CATEGORY	[108] CUSSE LAST ZONE
>>>[109] ENVIRONMENTAL EXPOSURE	>>>[110] PREGNATION
[111] FOOT SIZE	>>>[112] VOLUME

POINT TO CATEGORY [##] -GO- TO CONTINUE >>>

THE >>> SIGN INDICATES THE CATEGORIES THAT MAY REQUIRE ADJUSTMENT TO ALLOW MORE PRECISE FITTING OF YOUR FOOT

1	2	3	4	5	6	7	8	9	10	11	12	GO
---	---	---	---	---	---	---	---	---	----	----	----	----

FIG. 57

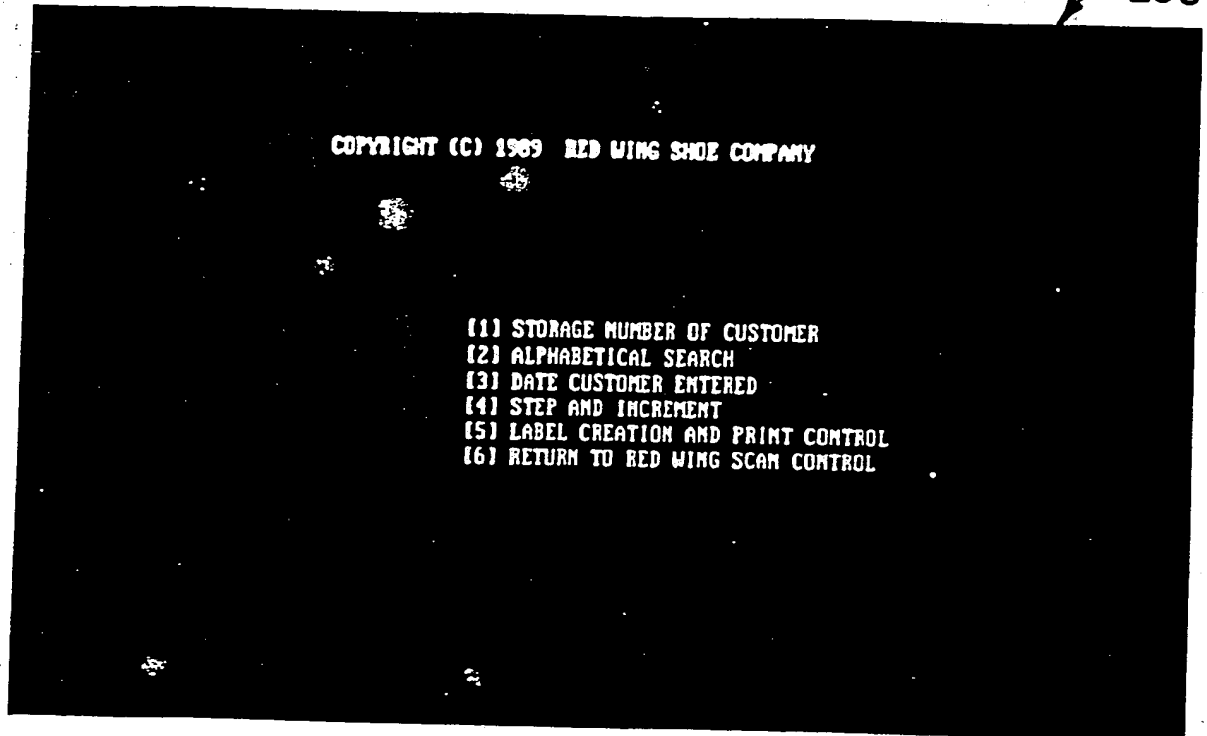


FIG. 58

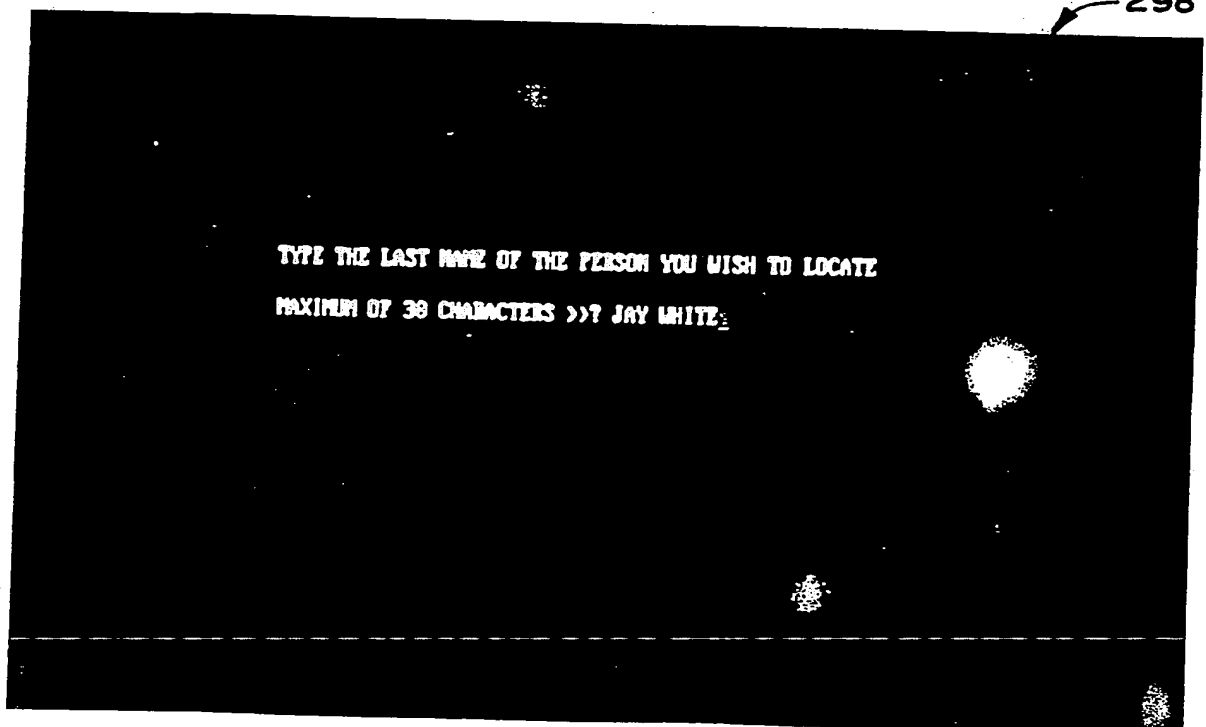


FIG. 59

300


CUSTOMER 17 JAY WHITE
1620 SW OVERTURE

DATE 04-05-1990 PHONE 503 389-8844
BEND OR 97782

PRESS H TO SEARCH MORE OR E TO EXIT

FIG. 60

320



SHELL TYPE
3 PIECE FLOATING TONGUE
SHELL MATERIALS
GILANE
SHELL FEATURES
ADJUSTABLE CANT LEAN

MODEL RAICHL FLEXION COMP DD

SKI ABILITY	RACE	FLEX INDEX 28
SEX SUITABILITY MENS		WIDTH " C-E
SIZES AVAILABLE 6-14		VOLUME LO-MD
		CURVE LAST 4-5
		PROMATION L-H

BUCKLE TYPE
3 MICRO ADJUST CABLE

FIT MATERIAL
LOW MEMORY FOAM

LINER COVER
PANNOLANNA

LINER FEATURES
VELCRO POWER STRAP

FOOTBED TYPE
ANATOMICAL

FOOTBED ADJUSTABILITY
SELF HOLDING

ADDITIONAL COMMENTS
TWIN GATE INNOVATION

FOOT TYPE
SUITABILITY

GOOD-G
MODIFY-M
TYPE 1 G
TYPE 2 G
TYPE 3 G

PAGE 4

PAGE 5

PAGE 6

PAGE 7

B I P O S

RETURN TO MAIN SCREEN

FIG.61

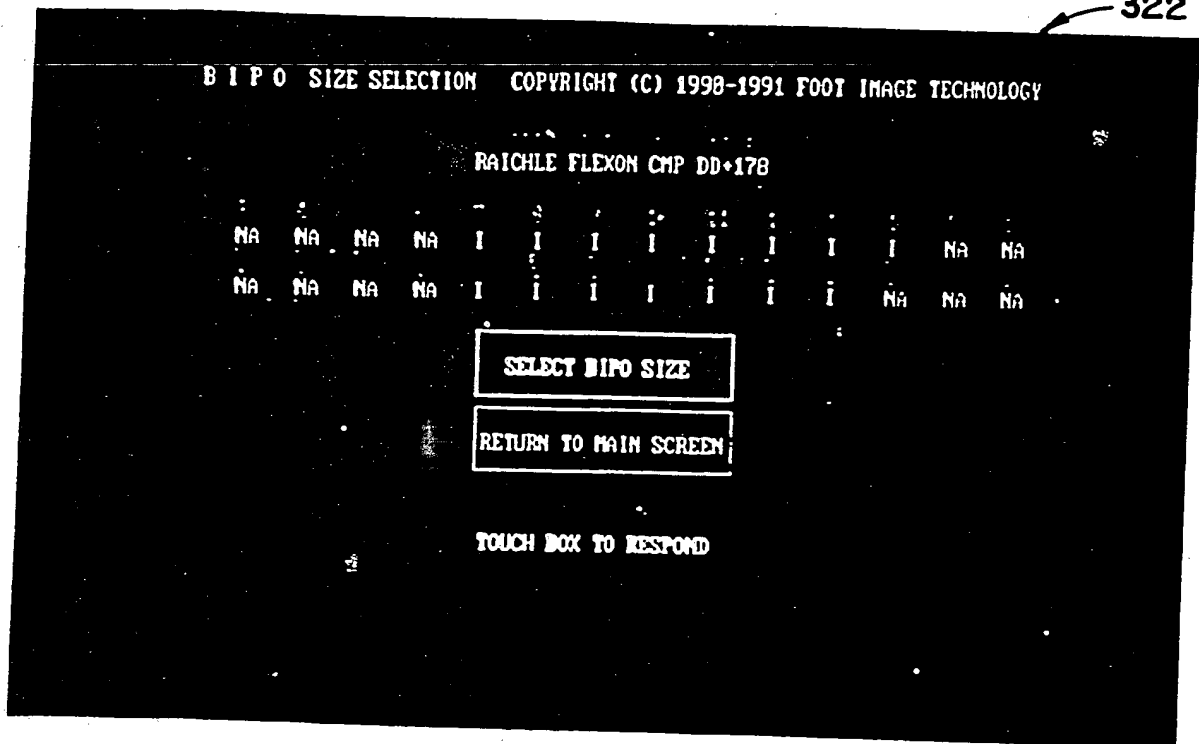


FIG.62

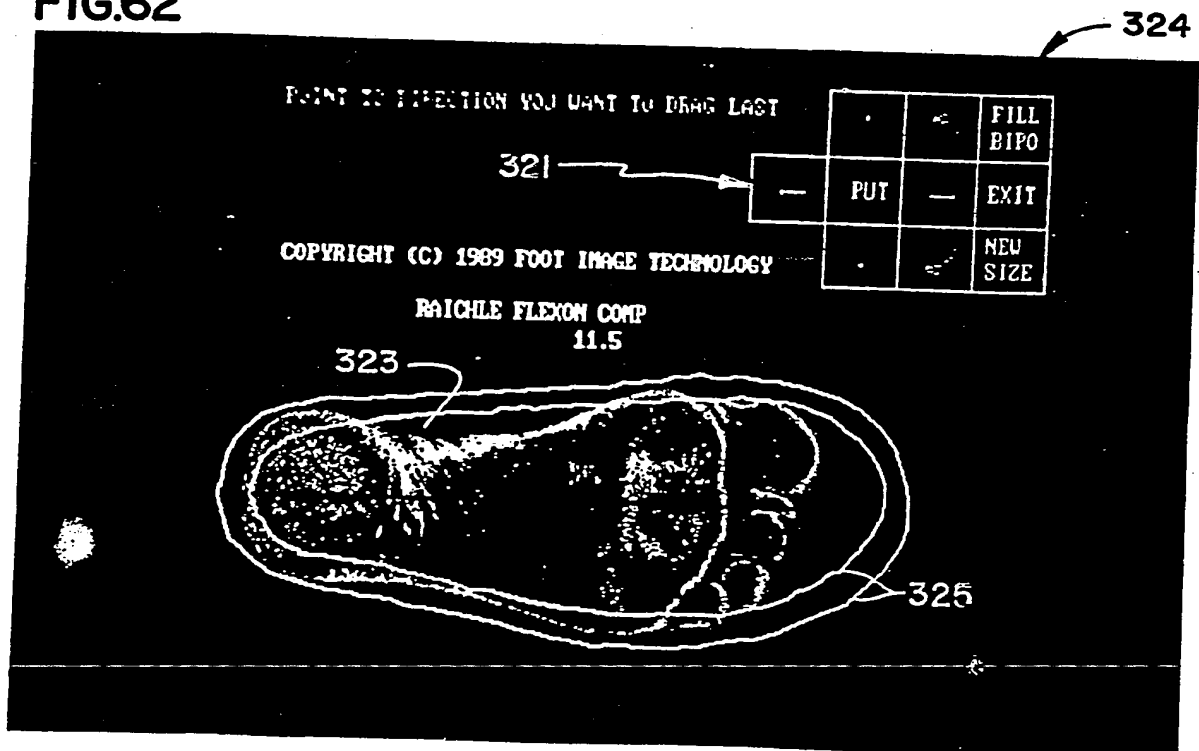


FIG.63

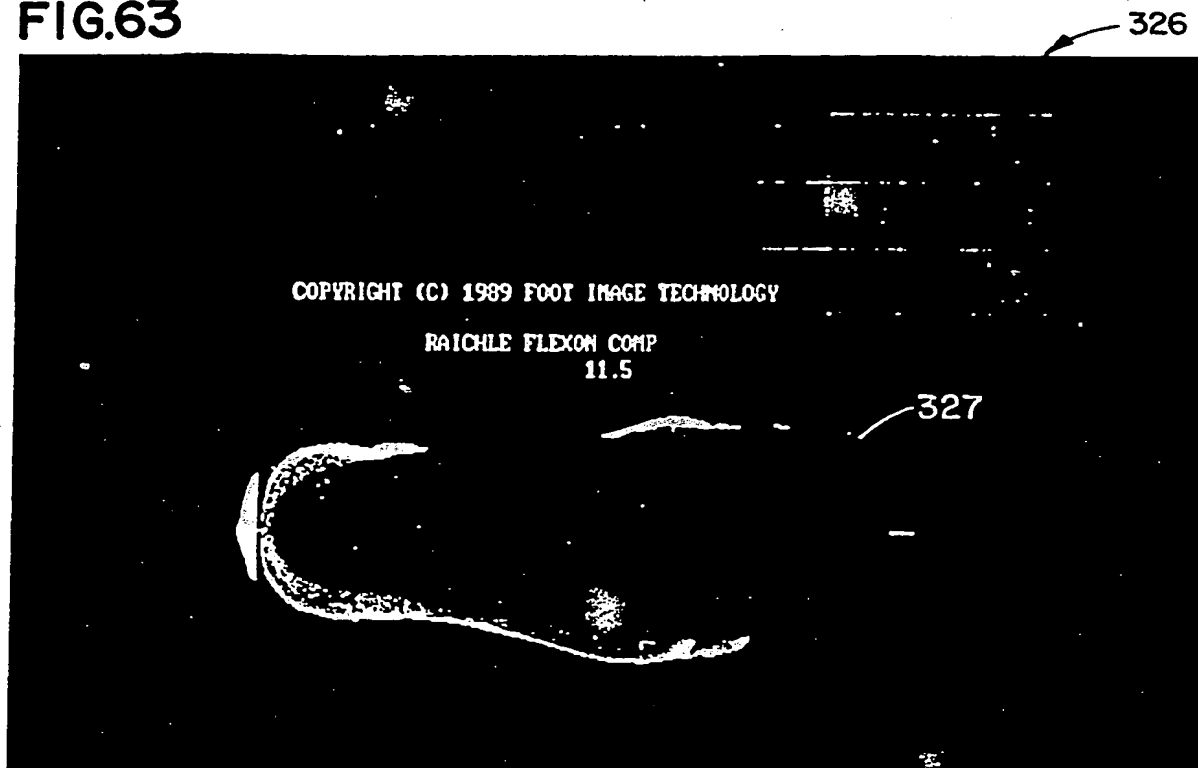


FIG.64

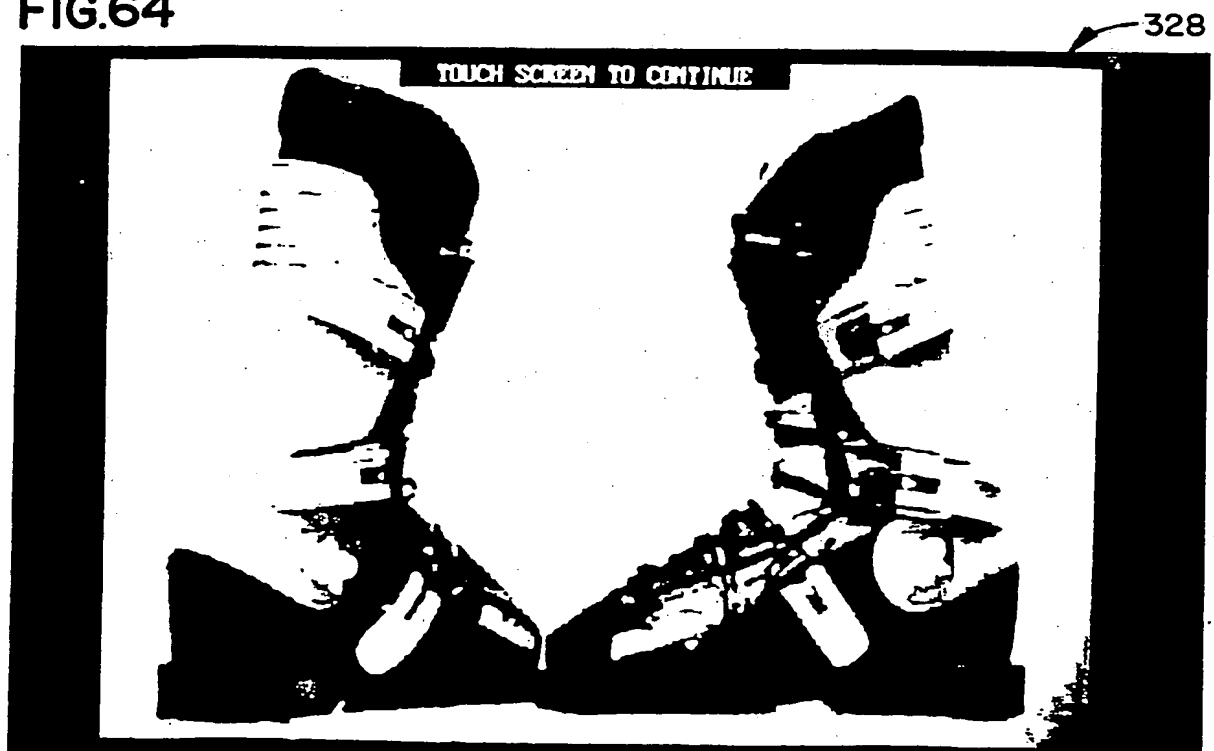


FIG.65


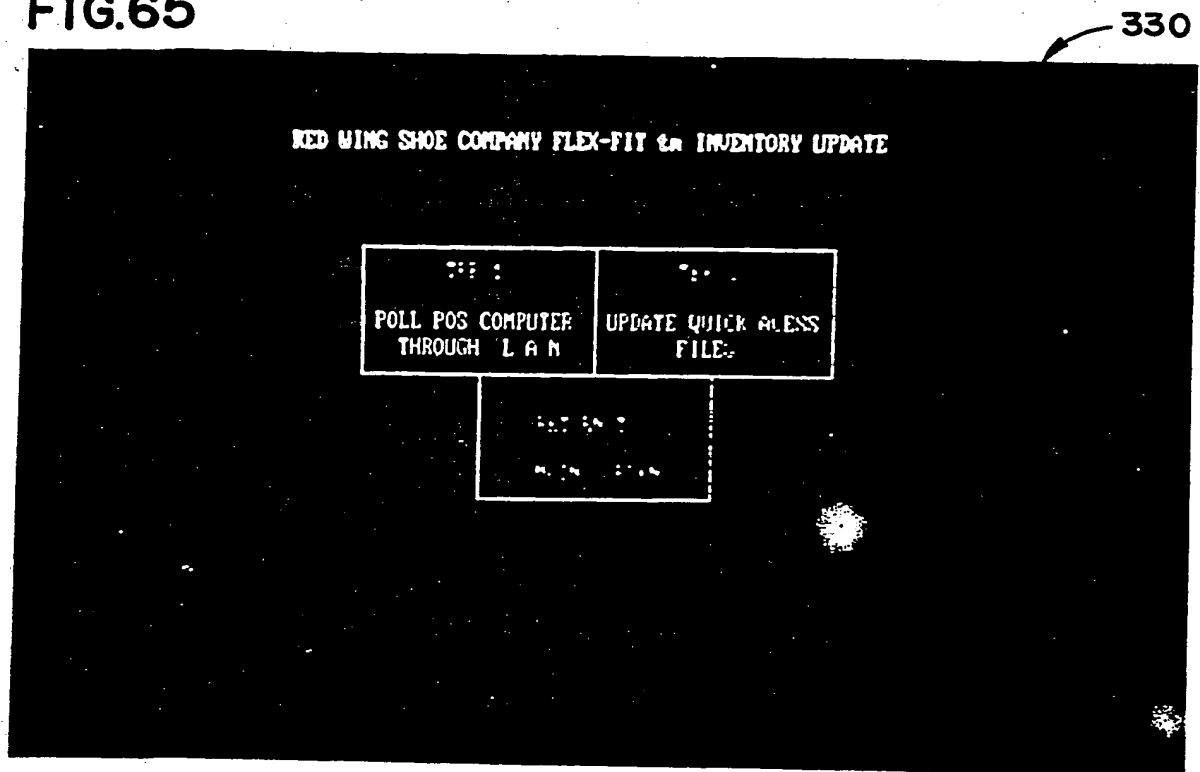



FIG.66

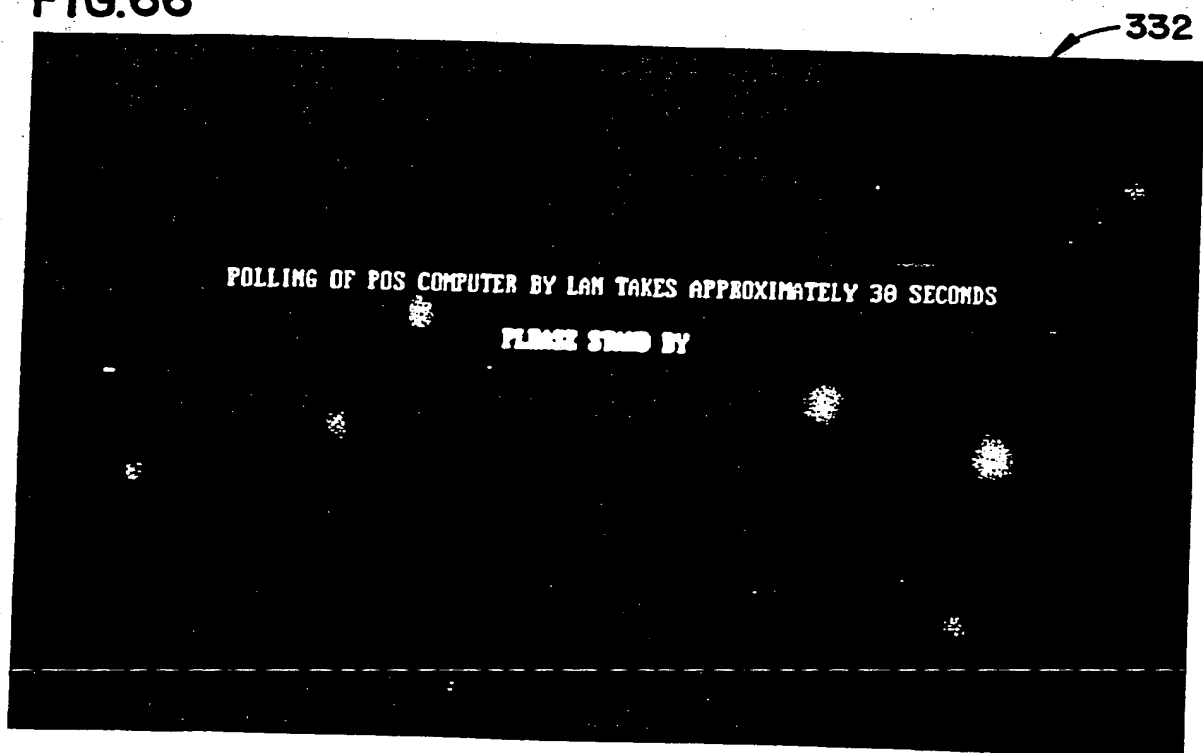

38 / 38

FIG.67

334

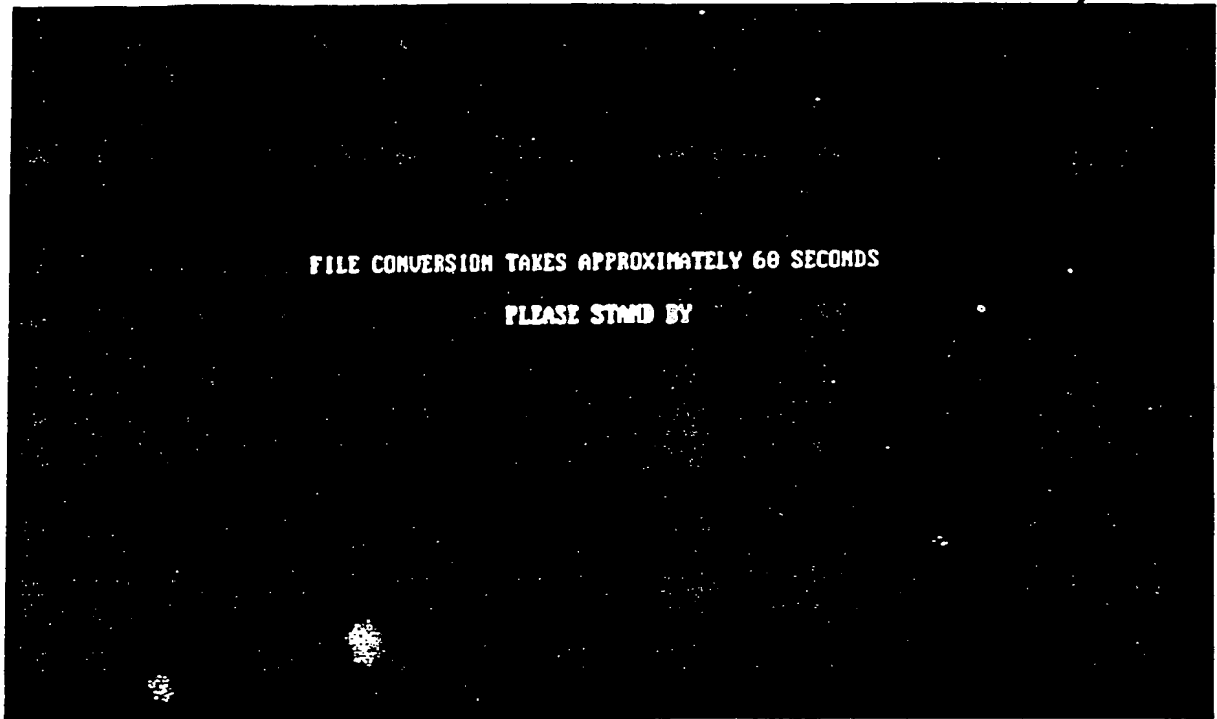

INTERNATIONAL SEARCH REPORT

International Application No PCT/US 90/02868

I. CLASSIFICATION OF SUBJECT MATTER (if several classification symbols apply, indicate all) *

According to International Patent Classification (IPC) or to both National Classification and IPC

IPC⁵: A 43 D 1/02, A 61 B 5/107, G 01 B 11/24

II. FIELDS SEARCHED

Minimum Documentation Searched ⁷

Classification System |

Classification Symbols

IPC⁵

A 43 D

Documentation Searched other than Minimum Documentation
to the Extent that such Documents are Included in the Fields Searched *

III. DOCUMENTS CONSIDERED TO BE RELEVANT *

Category *	Citation of Document, ¹¹ with Indication, where appropriate, of the relevant passages ¹²	Relevant to Claim No. ¹³
X	US, A, 4538353 (GARDNER) 3 September 1985 see column 3, lines 19-35 ---	1-15
X	Patent Abstracts of Japan, volume 12, no. 100 (P-683)(2947), 2 April 1988 & JP, A, 62233707 (NIREKO K.K.) 14 October 1987 see figures; abstract -----	1-15

* Special categories of cited documents: ¹⁰

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"Z" document member of the same patent family

IV. CERTIFICATION

Date of the Actual Completion of the International Search

3rd January 1991

Date of Mailing of this International Search Report

24. 01. 91

International Searching Authority

EUROPEAN PATENT OFFICE

Signature of Authorized Officer

Natalie Weinberg

ANNEX TO THE INTERNATIONAL SEARCH REPORT
ON INTERNATIONAL PATENT APPLICATION NO.

US 9002868
SA 38682

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the European Patent Office EDP file on 15/01/91. The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4538353	03-09-85	AU-B- 593530	15-02-90
		AU-A- 4686485	26-06-86
		CA-A- 1235226	12-04-88
		GB-A, B 2169073	02-07-86
		JP-A- 61154539	14-07-86
		US-A- 4604807	12-08-86

THIS PAGE BLANK (USPTO)

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☐ FADED TEXT OR DRAWING
- ☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☒ SKEWED/SLANTED IMAGES
- ☒ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)